HS50 Ultrasound System

DICOM Conformance Statement

Revision 1.0 System Version 1.00

Created: Sep 27, 2016 Last Updated: Sep 27, 2016



HS50 DICOM Conformance Statement

0 COVER PAGE

Company Name: SAMSUNG MEDISON CO., LTD

Produce Name: HS50

Version: 1.00

Internal Document Number:

Date: Sep 27, 2016

1 CONFORMANCE STATEMENT OVERVIEW

HS50 implements the necessary DICOM services to download worklists from information systems, save acquired US images and Structured Reports to a network storage device, CD or DVD, print to a networked hardcopy device and inform the information system about the work actually done.

Table 1-1 provides an overview of the network services supported by HS50.

SOD Classes Lloss of Service (SCU) Drevider of Service (SCD)			
SOP Classes	User of Service (SCU)	Provider of Service (SCP)	
Transfer			
Ultrasound Image Storage	Yes	No	
Ultrasound Multi-frame Image Storage Yes No		No	
Comprehensive SR Yes No		No	
Workflow Management			
Modality Worklist	Yes	No	
Storage Commitment Push Model	Yes	No	
Modality Performed Procedure Step Yes No		No	
Print Management			
Basic Grayscale Print Management	Yes	No	
Basic Color Print Management	Yes	No	
Query/Retrieve	·		
Study Root Information Model FIND	Yes	No	
Study Root Information Model MOVE	Yes	No	

Table 1-1 NETWORK SERVICES

Provide Storage SCP only Q/R service running.

Table 1-2 provides an overview of the Media Storage Application Profiles supported by HS50.

Table 1-2					
MEDIA SERVICES					
Media Storage Application Profile Write Files (FSC or FSU) Read Files (FSR)					
Compact Disk - Recordable					
STD-US-SC-MF-CDR Yes No		No			
DVD					
STD-US-SC-MF-DVD	Yes	No			

2 TABLE OF CONTENTS

0 COVER PAGE	2
1 CONFORMANCE STATEMENT OVERVIEW	
2 TABLE OF CONTENTS	4
3 INTRODUCTION	
3.1 REVISION HISTORY	
3.2 AUDIENCE	
3.3 REMARKS	
3.4 DEFINITIONS, TERMS AND ABBREVIATIONS	
3.5 REFERENCES	9
4 NETWORKING	
4.1 IMPLEMENTATION MODEL	
4.1.1 Application Data Flow	
4.1.2 Functional Definition of AE's	
4.1.2.1 Functional Definition of Storage Application Entity	
4.1.2.2 Functional Definition of Workflow Application Entity	
4.1.2.3 Functional Definition of Hardcopy Application Entity	
4.1.2.4 Functional Definition of the Q/R Application Entity	
4.1.2.5 Functional Definition of the Q/R Application Entity	
4.1.3 Sequencing of Real-World Activities	
4.2 AE SPECIFICATIONS	
4.2.1 Storage Application Entity Specification	
4.2.1.1 SOP Classes	
4.2.1.2 Association Policies	
4.2.1.3 Association Initiation Policy	
4.2.1.4 Association Acceptance Policy	
4.2.2 Workflow Application Entity Specification	

4.2.2.1 SOP Classes	
4.2.2.2 Association Establishment Policy	
4.2.2.3 Association Initiation Policy	
4.2.2.4 Association Acceptance Policy	
4.2.3 Hardcopy Application Entity Specification	
4.2.3.1 SOP Classes	
4.2.3.2 Association Policies	
4.2.3.3 Association Initiation Policy	
4.2.3.4 Association Acceptance Policy	
4.2.4 Q/R Application Entity Specification	
4.2.4.1 SOP Classes	
4.2.4.2 Association Establishment Policy	
4.2.4.3 Association Initiation Policy	
4.2.4.1 Association Acceptance Policy	
4.2.5 STORAGE-SCP Application Entity Specification	
4.2.5.1 SOP Classes	
4.2.5.1 Association Establishment Policy	
4.2.5.2 Association Initiation Policy	
4.2.5.3 Association Acceptance Policy	
4.3 NETWORK INTERFACE	
4.3.1 Physical Network Interface	
4.4 CONFIGURATION	
4.4.1 AE Title/Presentation Address Mapping	
4.4.1.1 Local AE Titles	
4.4.1.2 Remote AE Title/Presentation Address Mapping	
4.4.2 Parameters	
5 MEDIA INTERCHANGE	
5.1 IMPLEMENTATION MODEL	
5.1.1 Application Data Flow	
5.1.2 Functional Definition of AEs	
5.1.2.1 Functional Definition of Offline-Media Application Entity	
5.1.3 Sequencing of Real-World Activities	
5.1.4 File Meta Information Options	
5.2 AE SPECIFICATIONS	
5.2.1 Offline-Media Application Entity Specification	
5.2.1.1 File Meta Information for the Application Entity	

HS50 DICOM Conformance Statement

5.2.1.2 Real-World Activities	
6 SUPPORT OF CHARACTER SETS	
7 SECURITY	67
8 ANNEXES	68
8.1 IOD CONTENTS	
8.1.1 Created SOP Instances	
8.1.1.1 US or US Multiframe Image IOD	
8.1.1.2 Comprehensive Structured Report IOD	
8.1.1.3 Common Modules	
8.1.1.4 US or US Multiframe Image Module	
8.1.1.5 Comprehensive Structured Report Modules	
8.1.2 Used Fields in received IOD by application	
8.1.3 Attribute mapping	
8.1.4 Coerced/Modified Fields	
8.2 DATA DICTIONARY OF PRIVATE ATTRIBUTES	
8.3 CODED TERMINOLOGY AND TEMPLATES	
8.4 STANDARD EXTENDED / SPECIALIZED / PRIVATE SOP CLASSE	
8.4.1 US OR US MULTIFRAME IMAGE STORAGE SOP CLASS	
8.5 PRIVATE TRANSFER SYNTAXES	
9 STRUCTURED REPORT TEMPLATES	
9.1 OB-GYN STRUCTURED REPORT TEMPLATE	
9.1.1 OB-GYN Ultrasound Report Templates(TID 5000)	
9.1.1.1 Observation ConText (TID 1001)	
9.1.1.2 Patient Characteristics (TID 5001)	
9.1.1.3 OB-GYN Summary Section (TID 5002)	
9.1.1.4 OB-GYN Fetal Biometry Ratio Section (TID 5004)	
9.1.1.5 OB-GYN Fetal Biometry Section (TID 5005)	
9.1.1.6 OB-GYN Fetal Long Bones Section (TID 5006)	
9.1.1.7 OB-GYN Fetal Cranium Section (TID 5007)	
9.1.1.8 OB-GYN Early Gestation Section (TID 5011)	
9.1.1.9 OB-GYN Fetal Biophysical Profile Section (TID 5009)	
9.1.1.10 OB-GYN Amniotic Sac Section (TID 5010)	
9.1.1.11 OB-GYN Pelvis and Uterus Section (TID 5015)	
9.1.1.12 OB-GYN Ovary Section (TID 5010)	

9.1.1.13	OB-GYN Left Ovarian Follicles Section (TID 5010)	98
9.1.1.14	OB-GYN Right Ovarian Follicles Section (TID 5010)	99
9.1.1.15	OB-GYN Embryonic Vascular Structure - General Report Format (TID 5010)	99
9.1.1.16	OB-GYN Pelvic Vasculature Anatomical Location - General Report Format (TID 5010)	100
9.1.1.17	OB-GYN Fetal Doppler - ViewPoint Format	102
9.1.1.18	OB-GYN Maternal Doppler Measurements - ViewPoint Format	105
9.1.2 D	CMR Context Groups used in HS50	108
9.1.2.1	Standard Extended Context Groups in OB-GYN SR	108
9.1.2.2	Gestational Age Equations and Tables (Context Group 12013)	115
9.1.2.3	OB Fetal Body Weight Equations and Tables (Context ID 12014)	116
9.1.2.4	Fetal Growth Equations and Tables (Context ID 12015)	117
9.1.2.5	Estimated Fetal Weight Percentile Equations and Tables (Context ID 12016)	118

3 INTRODUCTION

3.1 REVISION HISTORY

Document	System	Date of Issue	Author	Description
Version	Version			
1.00	1.00	Sep 27, 2016	SAMSUNG MEDISON	Final Text for System 1.0

3.2 AUDIENCE

This document is intended for hospital staff, health system integrators, software designers or implementers. It is assumed that the reader has a working understanding of DICOM.

3.3 REMARKS

DICOM, by itself, does not guarantee interoperability. However, the Conformance Statement facilitates a first-level validation for interoperability between different applications supporting the same DICOM functionality.

This Conformance Statement is not intended to replace validation with other DICOM equipment to ensure proper exchange of information intended.

The scope of this Conformance Statement is to facilitate communication with SAMSUNG MEDISON and other vendor's Medical equipment. The Conformance Statement should be read and understood in conjunction with the DICOM Standard [DICOM]. However, it is not guaranteed to ensure by itself the desired interoperability and a successful interconnectivity.

The user should be aware of the following important issues:

- The comparison of different conformance statements is the first step towards assessing interconnectivity between SAMSUNG MEDISON and non – SAMSUNG MEDISON equipment.

- Test procedures should be defined to validate the desired level of connectivity.

- The DICOM Standard will evolve to meet the users' future requirements. SAMSUNG MEDISON is activity involved in developing the standard further and therefore reserves the right to make changes to its products or to

discontinue their delivery.

3.4 DEFINITIONS, TERMS AND ABBREVIATIONS

Definitions, terms and abbreviations used in this document are defined within the different parts of the DICOM Standard.

Abbreviations and terms are as follows:

AE	DICOM Application Entity
AET	Application Entity Title
ASCE	Association Control Service Element
CD-R	Compact Disk Recordable
FSC	File-Set Creator
FSU	File-Set Updater
FSR	File-Set Reader
IOD	(DICOM) Information Object Definition
ISO	International Standard Organization
MPPS	Modality Performed Procedure Step
MSPS	Modality Scheduled Procedure Step
Q/R	Query and Retrieve
R	Required Key Attribute
0	Optional Key Attribute
PDU	DICOM Protocol Data Unit
SCU	DICOM Service Class User (DICOM client)
SCP	DICOM Service Class Provider (DICOM server)
SOP	DICOM Service-Object Pair
U	Unique Key Attribute

3.5 **REFERENCES**

[DICOM] Digital Imaging and Communications in Medicine (DICOM), NEMA PS 3.1-3.20, 2011

4 NETWORKING

4.1 IMPLEMENTATION MODEL

4.1.1 Application Data Flow

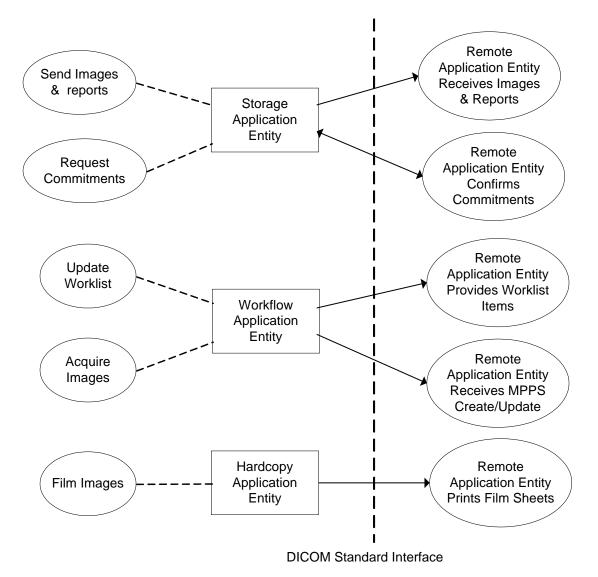


Figure 4.1-1 APPLICATION DATA FLOW DIAGRAM

 The Storage Application Entity sends images, Structured Reports and requests Storage Commitment to a remote AE. It is associated with the local real-world activities "Send Images & Reports" and "Request Commitments". Methods to send SOP Instances(images and Structured Reports) depend on user configuration, "Send on end exam", "Send after acquisition" or "Send manually". "Send manually" mode is performed upon user request for each study or for specific images selected. "Send on end exam" mode starts to send SOP Instances at End Exam for each study. "Send after acquisition" mode starts when the first SOP Instance is acquired for each study and SOP Instances are transferred immediately after acquisition.

If the remote AE is configured as an archive device, the Storage AE will request Storage Commitment and if a commitment is successfully obtained, it will record this information in the local database and displayed it in the Exam List.

- The Workflow Application Entity receives Worklist information from and sends MPPS information to a remote AE. It is associated with the local real-world activities "Update Worklist" and "Acquire Images". When the "Update Worklist" local real-world activity is performed, the Workflow Application Entity queries a remote AE for worklist items and provides the set of worklist items matching the query request. "Update Worklist" is performed as a result of an operator request or can be performed automatically at specific time intervals. When the "Acquire Images" local real-world activity is performed, the Workflow Application Entity creates and updates Modality Performed Procedure Step instances managed by a remote AE. Acquisition of images will result in automated creation of an MPPS Instance. Completion of the MPPS is performed at End Exam for each study.
- The Hardcopy Application Entity prints images on a remote AE (Printer). It is associated with the local realworld activity "Film Images". Methods to film Images depend on user configuration and are equal to the Sending images' of the Storage Application Entity.

4.1.2 Functional Definition of AE's

4.1.2.1 Functional Definition of Storage Application Entity

The existence of a send-job with associated network destination will activate the Storage AE. An association request is sent to the destination AEs and upon successful negotiation of a Presentation Context, the image or Structured Report transfer is started. If the association cannot be opened, the related send-job is set to an error state and can be restarted by the user via DICOM Spooler interface or automatically. An automatic retry (retry interval, retry count) can be configured using the Setup/DICOM Menu.

4.1.2.2 Functional Definition of Workflow Application Entity

Worklist Update attempts to download a Worklist from a remote node. If the Workflow AE establishes an

association to a remote AE, it will transfer all matching worklist items via the open Association. By default, Worklist Update use "US" for Modality, current date for Scheduled Procedure Step Start Date and blank (displayed "Any") for Scheduled Station AE-Title as query parameters. The results will be displayed in a separate list, which will be cleared with the next Worklist Update.

The Workflow AE performs the creation of an MPPS Instance automatically whenever the first SOP Instance is acquired for each study. The MPPS "Complete" or "Discontinued" states can only be set by "End Exam" for each study.

4.1.2.3 Functional Definition of Hardcopy Application Entity


The existence of a print-job will activate the Hardcopy AE. An association is established with the printers and the printer's status determined. If the printer is operating normally, the film sheets described within the print-job will be printed. If the printer is not operating normally, the print-job will set to an error state and can be restarted by the user via DICOM Spooler manager interface or automatically. An automatic retry (retry interval, retry count) can be configured using the Setup/DICOM Menu.

4.1.2.4 Functional Definition of the Q/R Application Entity

The Query function is activated through the user interface when the user selects a Q/R AE to query (from a preconfigured list), then initiates a query. Queries are performed per the study or series. Retrieval is activated through the user interface when the user selects a series for retrieval. A connection to the Q/R AE is established to initiate and monitor the retrieval and the STORAGE-SCP AE receives the retrieved instances.

4.1.2.5 Functional Definition of the Q/R Application Entity

The STORAGE-SCP AE waits for another application to connect from the presentation address configured for its AE Title. When another application connects, the STORAGE-SCP AE expects it to be a DICOM application. The STORAGE-SCP AE will accept associations with presentation contexts for SOP Classes of the Storage Device. Any images received in such Presentation Contexts will be stored in the system. Provide Storage SCP only Q/R service running.

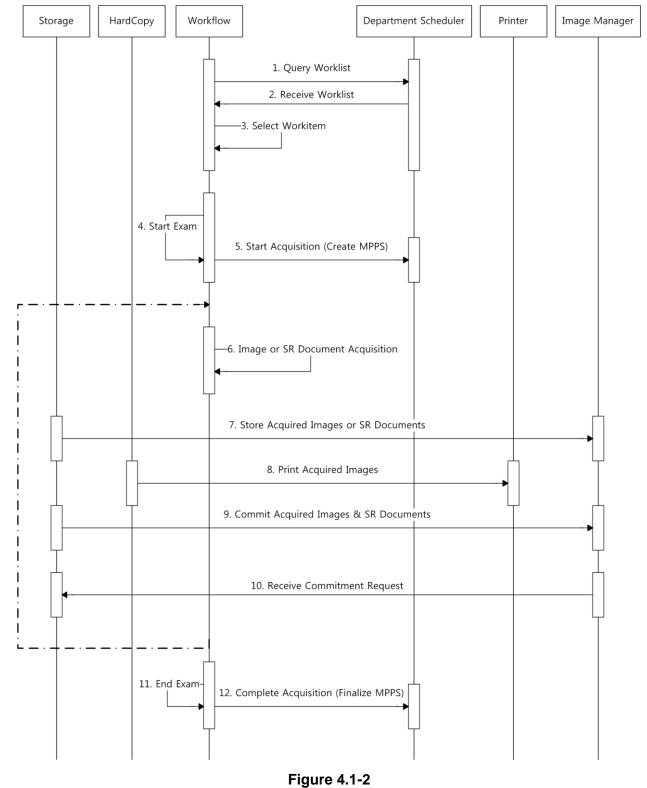

4.1.3 Sequencing of Real-World Activities

SEQUENCING CONTRAINTS – SEND AFTER ACQUISITION

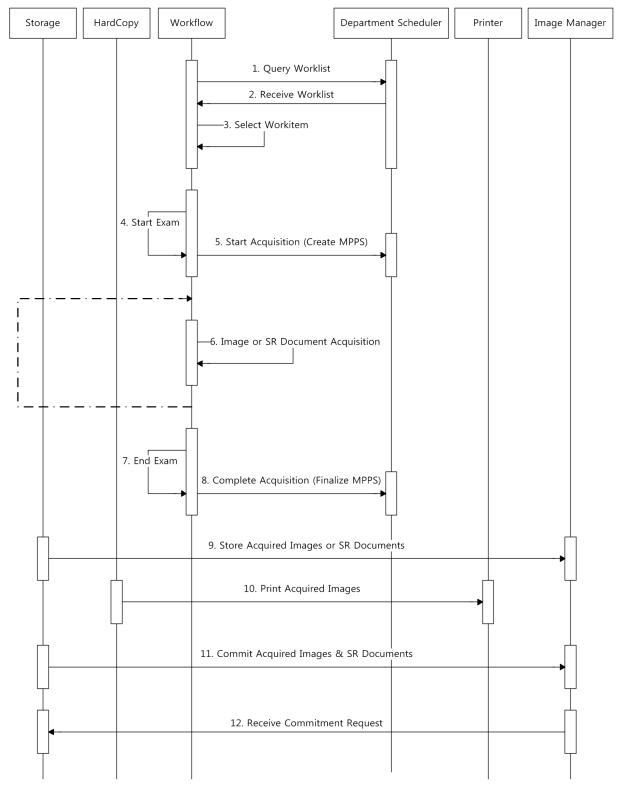


Figure 4.1-3 SEQUENCING CONSTRAINTS – SEND ON END EXAM

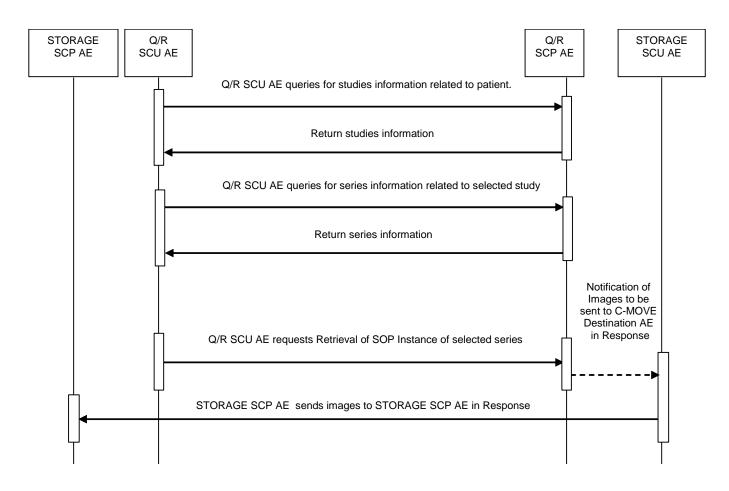


Figure 4.1-4 SEQUENCING CONSTRAINTS – QUERY AND RETRIEVE

Under normal scheduled workflow conditions, the sequencing constraints are illustrated in Figure 4.1-2, Figure 4.1-3 and Figure 4.1-3

Other workflow situations (e.g. unscheduled procedure steps) will have other sequencing constraints. Printing could equally take place after the images acquired have been stored. Printing could be omitted completely if no printer is connected or hardcopies are not required.

4.2 AE SPECIFICATIONS

4.2.1 Storage Application Entity Specification

4.2.1.1 SOP Classes

HS50 provides Standard Conformance to the following SOP Classes:

SOP CLASSES FOR AE STORAGE			
SOP Classes	SOP Class UID	SCU	SCP
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1	Yes	No
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.3.1	Yes	No
Comprehensive Structured Report Storage	1.2.840.10008.5.1.4.1.1.88.33	Yes	No
Storage Commitment Push Model	1.2.840.10008.1.20.1	Yes	No
Verification	1.2.840.10008.1.1	Yes	Yes

Table 4.2-1
SOP CLASSES FOR AE STORAGE

4.2.1.2 Association Policies

4.2.1.2.1 General

The DICOM Standard application context name for DICOM 3.0 is always proposed:

Table 4.2	2-2
DICOM APPLICATION CONTE	EXT FOR AE STORAGE
Application Context Name	1.2.840.10008.3.1.1.1

4.2.1.2.2 Number of Associations

HS50 can initiate one or more Associations at a time for each destination to which a transfer request is being processed in the active job queue list.

Table 4.2-3 NUMBER OF ASSOCIATIONS INITIATED FOR AE STORAGE

Maximum number of simultaneous Associations	Unlimited
---------------------------------------------	-----------

HS50 accepts Associations to receive N-EVENT_REPORT notifications for the Storage Commitment Push Model SOP Class.

Table 4.2-4

NUMBER OF ASSOCIATIONS ACCEPTED FOR AE STORAGE

Maximum number of simultaneous Associations	Unlimited	
---------------------------------------------	-----------	--

4.2.1.2.3 Asynchronous Nature

HS50 does not support asynchronous communications (multiple outstanding transactions over a single Association).

Table 4.2-5

ASYNCHRONOUS NATURE AS A SCU FOR AE STORAGE

Maximum number of outstanding asynchronous transactions	1
---------------------------------------------------------	---

4.2.1.2.4 Implementation Identifying Information

The implementation information for this Application Entity is:

Table 4.2-6 DICOM IMPLEMENTATION CLASS AND VERSION FOR AE STORAGE

Implementation Class UID	1.2.410.200001.101.11.501
Implementation Version Name	HS50

4.2.1.3 Association Initiation Policy

4.2.1.3.1 Activity – Send Images and Structured Reports and Requests Commitment

4.2.1.3.1.1 Description and Sequencing of Activities

A user can select exams or images and request them to be sent to some destination. Each request is forwarded to the job queue and processed individually. When the "Send on end exam" or "Send after acquisition" option is active, Stored images and reports will be forwarded to the network job queue for a pre-configured auto-send target destination automatically. For "Send on end exam" and "Send manually" configuration, the system opens an association, sends all images in the study, and closes the association. If "Send after acquisition" is selected, the system handles the association with the Storage SCP Server using the following method.

- a. Open an Association when the image is acquired.
- b. If an error occurs while sending an SOP Instance to the server because there is no longer an open association (server timed-out), attempt to re-establish the association.

c. When one image is sended, close the open association after SOP Instances remained in that study are sent.

If the remote AE is configured as an archive device, the Storage AE will, after all images and reports have been sent, transmit Storage Commitment request (N-ACTION) over a separate Association. The Storage AE can only receive an N-EVENT-REPORT request in a subsequent association initiated by the SCP.

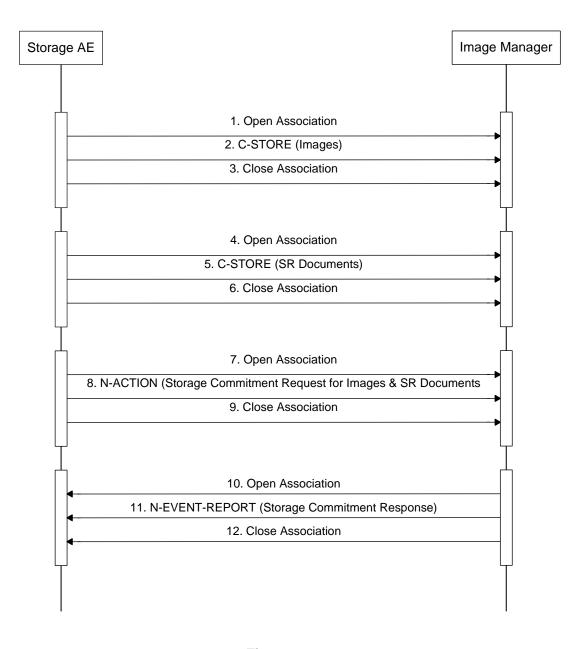


Figure 4.2-1 SEQUENCING OF ACTIVITY - SEND IMAGES AND SR DOCUMENTS

A possible sequence of interactions between the Storage AE and an Image Manager (e.g. a storage or archive device supporting the Storage and Storage Commitment SOP Classes as an SCP) is illustrated in the figure above.

NOTE: The N-EVENT-REPORT must be sent over a separate association initiated by the Image Manager. (See Section 4.2.1.4)

4.2.1.3.1.2 Proposed Presentation Contexts

HS50 is capable of proposing the Presentation Contexts shown in the following table.

	PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY SEND IMAGES					
	Presentation Context Table					
Abstract S	Abstract Syntax Transfer Syntax			Role	Ext.	
Name	UID	Name List	UID List		Neg.	
Ultrasound Image	1.2.840.10008.5.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None	
Storage	1.4.1.1.6.1	JPEG Lossy Baseline	1.2.840.10008.1.2.4			
			.50			
Ultrasound Multi-frame	1.2.840.10008.5.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None	
Image Storage	1.4.1.1.3.1	JPEG Lossy Baseline	1.2.840.10008.1.2.4			
			.50			
Comprehensive	1.2.840.10008.5.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None	
Structured Report	1.4.1.1.88.33					
Storage						
Storage Commitment	1.2.840.10008.1.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None	
Push Model	20.1	Explicit VR Little Endian	1.2.840.10008.1.2.1			
Verification	1.2.840.10008.1.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None	
	1	Explicit VR Little Endian	1.2.840.10008.1.2.1	/SCP		

Table 4.2-7 PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY SEND IMAGES

Presentation Contexts for Ultrasound Image Storage and Ultrasound Multi-frame Image Storage will be proposed for the "STORAGE" device configured in Setup/Connectivity/DICOM.

A Presentation Context for Comprehensive Structured Report Storage will be proposed for the "STORAGE SR" device configured in Setup/ Connectivity/DICOM.

A Presentation Context for Storage Commitment Push Model will be proposed for the "SC" device configured in

Setup/ Connectivity/DICOM.

A Presentation Context for Verification will be proposed when a user press the "Verify" button for a configured device.

4.2.1.3.1.3 SOP Specific Conformance Image & Comprehensive Structured Report Storage SOP Classes

All Image & Structured Report Storage SOP Classes supported by the Storage AE exhibit the same behavior, except where stated, and are described together in this section.

Service Status	Further Meaning	Error Code	Behavior
Success	Success	0000	The SCP has successfully stored the SOP Instance. If all SOP Instances succeed, the job is marked as complete.
Refused	Out of Resources	A700-A7FF	The association is aborted using A-ABORT and the send job is marked as failed. The status is logged.
Error	Data Set does not match SOP Class	A900-A9FF	Same as "Refused" above.
Error	Cannot Understand	C000-CFFF	Same as "Refused" above.
Warning	Coercion of Data Elements	B000	Image transmission is considered successful.
Warning	Data Set does not match SOP Class	B007	Same as "Warning" above.
Warning	Elements Discards	B006	Same as "Warning" above.
*	*	Any other status code.	Same as "Refused" above.

Table 4.2-8

STORAGE C-STORE RESPONSE STATUS HANDLING BEHAVIOR

The Behavior of Storage AE during communication failure is summarized in the Table below:

Table 4.2-9

Exception	Behavior
Timeout	The Association is aborted using A-ABORT and
	the send job is marked as failed.
Association aborted by the SCP or network layers	The Send job is marked as failed.

STORAGE COMMUNICATION FAILURE BEHAVIOR

A failed send job can be restarted by user interaction. The system can be configured to automatically resend failed jobs if a transient status code is received. The delay between resending failed jobs and the number of retries is also configurable.

4.2.1.3.1.4 SOP Specific Conformance for Storage Commitment SOP Class

4.2.1.3.1.4.1 Storage Commitment Operations (N-ACTION)

The Storage AE will request storage commitment for the configured device for instances of the Ultrasound Image, Ultrasound Multi-frame Image and Structured Report Storage SOP Classes.

The Storage AE will consider Storage Commitment failed if no N-EVENT-REPORT is received for a Transaction UID within a configurable time period after receiving a successful N-ACTION response (duration of applicability for a Transaction UID).

The Storage AE does not send the optional Storage Media FileSet ID & UID Attributes or the Referenced Study Component Sequence Attribute in the N-ACTION

The Behavior of Storage AE when encountering status codes in an N-ACTION response is summarized in the Table below:

Service	Further	Error Code	Behavior
Status	Meaning		
			The request for storage comment is considered successfully
Success	Success	0000	sent. The system waits for the association of the N-Event-
			Report.
*	*	Any other status	The Association is aborted using A-Abort and the request for
		code.	storage comment is marked as failed

Table 4.2-10 STORAGE COMMITMENT N-ACTION RESPONSE STATUS HANDLING BEHAVIOR

The behavior of Storage AE during communication failure is summarized in the Table below:

Table 4.2-11 STORAGE COMMITMENT COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior
Timeout	The Association is aborted using A-ABORT and
	the storage commitment job is marked as failed.
Association aborted by the SCP or network layers	The storage commitment job is marked as
	failed.

4.2.1.3.1.4.2 Storage Commitment Notification (N-EVENT-REPORT)

The Storage AE is capable of receiving an N-EVENT-REPORT notification if it has successfully negotiated a Presentation Context for the Storage Commitment Push Model.

Upon receipt of an N-EVENT-REPORT the timer associated with the Transaction UID will be cancelled.

The behavior of Storage AE when receiving Event Types within the N-EVENT-REPORT is summarized in the Table below.

Table 4.2-12

Event Type Name	Event Type	Behavior		
	ID			
Storage Commitment	1	The commit status is set to "Y" for each exam in the exam list.		
Request Successful		Auto deletion for committed exam is not supported.		
Storage Commitment	2	The commit status is set to "N" for each exam in the exam list.		
Request Complete –		The Referenced SOP Instances under Failed SOP Sequence		
Failures Exists		(0008, 1198) are logged. A send job that failed storage commitment		
		will not be automatically restarted but can be restarted by user		
		interaction.		

STORAGE COMMITMENT N-EVENT-REPORT BEHAVIOR

The reasons for returning specific status codes in an N-EVENT-REPORT response are summarized in the Table below.

Table 4.2-13

STORAGE COMMITMENT N-EVENT-REPORT RESPONSE STATUS REASONS

Service Status	Further Meaning	Error Code	Behavior
Success	Success	0000	The Storage commitment result has been successfully received.
Failure	Unrecognized Operation	0211H	The Transaction UID in the N_EVENT_REPORT request is not (was never issued within an N_ACTION request)
Failure	No Such Event Type	0113H	An invalid Event Type ID was supplied in the N_EVENT_REPORT request
Failure	Processing Failure	0110H	An internal error occurred during processing of the N_EVENT_REPORT

4.2.1.3.1.5 SOP Specific Conformance for Verification

The Behavior when encountering status codes in a C-ECHO response is summarized in the Table below:

Service	Further	Error Code	Behavior
Status	Meaning		
Success	Success	0000	Verification Status is set to 'Success'
*	*	Any other status code	Verification Status is set to 'Failed'

Table 4.2-14VERIFICATION C-ECHO RESPONSE STATUS HANDLING BEHAVIOR

The Behavior of Storage AE during communication failure is summarized in the Table below:

Table 4.2-15

VERIFICATION COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior
Timeout	The Association is aborted using A-ABORT and
	the verification job is marked as failed.
Association aborted by the SCP or network layers	The verification job is marked as failed.

4.2.1.4 Association Acceptance Policy

4.2.1.4.1 Activity – Receive Storage Commitment Response

4.2.1.4.1.1 Description and Sequence of Activities

The Storage AE will accept associations in order to receive responses to a Storage Commitment Request.

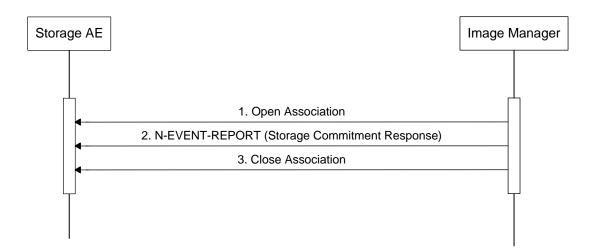


Figure 4.2-2 SEQUENCING OF ACTIVITY - RECEIVE STORAGE COMMITMENT RESPONSE

A possible sequence of interactions between the Storage AE and an Image Manager (e.g. a storage or archive device supporting Storage Commitment SOP Classes as an SCP) is illustrated in the Figure above:

1. The Image Manager opens a new association with the Storage AE.

2. The Image Manager sends an N-EVENT-REPORT request notifying the Storage AE of the status of a previous Storage Commitment Request. The Storage AE replies with an N-EVENT-REPORT response confirming receipt.

3. The Image Manager closes the association with the Storage AE.

4.2.1.4.1.2 Accepted Presentation Contexts

The Storage AE will accept Presentation Contexts as shown in the Table below.

Table 4.2-16

ACCEPTABLE PRESENTATION CONTEXTS FOR ACTIVITY RECEIVE STORAGE COMMITMENT RESPONSE

Presentation Context Table								
Abstrac	Abstract Syntax Transfer Syntax							
Name	UID	Name List	Name List UID List					
Storage	1.2.840.10008.1.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None			
Commitment	20.1	Explicit VR Little Endian	1.2.840.10008.1.2.1					
Push Model								
Verification	1.2.840.10008.1.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None			
	1	Explicit VR Little Endian	1.2.840.10008.1.2.1					

4.2.1.4.1.3 SOP Specific Conformance for Storage Commitment SOP Class

4.2.1.4.1.3.1 Storage Commitment Notifications (N-EVENT-REPORT)

Upon receipt of an N-EVENT-REPORT the timer associated with the Transaction UID will be cancelled.

The behavior of Storage AE when receiving Event Types within the N-EVENT_REPORT is summarized in Table 4.2-12.

The reasons for returning specific status codes in an N-EVENT-REPORT response are summarized in Table 4.2-13.

4.2.1.4.1.4 SOP Specific Conformance for Verification SOP Class

The Storage AE provides standard conformance to the Verification SOP Class as an SCP. If the C-ECHO request was successfully received, a 0000 (Success) status code will be returned in the C-ECHO response.

4.2.2 Workflow Application Entity Specification

4.2.2.1 SOP Classes

HS50 provides Standard Conformance to the following SOP Classes:

Table 4.2-17SOP CLASSES FOR AE WORKFLOW

SOP Classes	SOP Class UID	SCU	SCP
Modality Worklist Information Model – FIND	1.2.840.10008.5.1.4.31	Yes	No
Modality Performed Procedure Step	1.2.840.10008.3.1.2.3.3	Yes	No

4.2.2.2 Association Establishment Policy

4.2.2.2.1 General

The DICOM standard application context name for DICOM 3.0 is always proposed.

Table 4.2-18	
DICOM APPLICATION CONTEXT FOR AE WORKFLOW	

Application Context Name	1.2.840.10008.3.1.1.1
--------------------------	-----------------------

4.2.2.2.2 Number of Associations

HS50 initiates one Association at a time for a Worklist request.

Table 4.2-19

NUMBER OF ASSOCIATIONS INITIATED FOR AE WORKFLOW

Maximum number of simultaneous Associations	1
---------------------------------------------	---

4.2.2.2.3 Asynchronous Nature

HS50 does not support asynchronous communications (multiple outstanding transactions over a single Association)

Table 4.2-20

ASYNCHRONOUS NATURE AS A SCU FOR AE WORKFLOW

Maximum number of outstanding asynchronous transactions 1

4.2.2.2.4 Implementation Identifying Information

The implementation information for this Application Entity is:

Table 4.2-21

DICOM IMPLEMENTATION CLASS AND VERSION FOR AE WORKFLOW

Implementation Class UID	1.2.410.200001.101.11.501
Implementation Version Name	HS50

4.2.2.3 Association Initiation Policy

4.2.2.3.1 Activity – Worklist Update

4.2.2.3.1.1 Description and Sequencing of Activities


The request for a Worklist Update is initiated by user interaction.


The interactive Worklist Query will display a dialog for entering data as search criteria. When the Query is started on your request, only the data from the dialog will be inserted as matching keys into the query.

With automated worklist queries the HS50 always requests all items for a Scheduled Procedure Step Start Date (actual date), Modality (US) and Scheduled Station AE Title.

Upon initiation of the request, the HS50 will build an Identifier for the C-FIND request, will initiate an Association to send the request and will wait for Worklist responses. After retrieval of all responses, HS50 will access the local database to add patient demographic data. The results will be displayed in a separate list, which will be cleared with the next worklist update.

HS50 will initiate an Association in order to issue a C-FIND request according to the Modality Worklist Information Model.

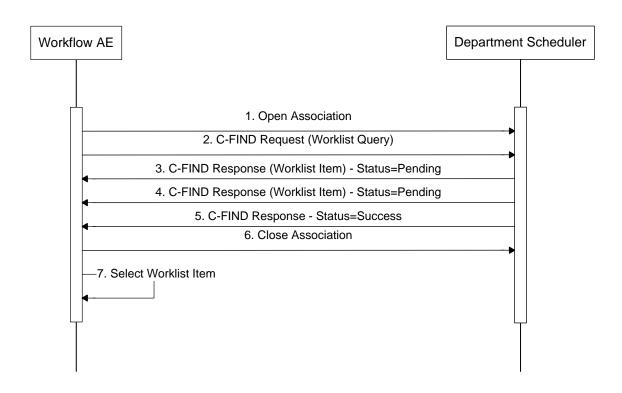



A possible sequence of interactions between the Workflow AE and a Departmental Scheduler (e.g. a device such as a RIS or HIS which supports the Modality Worklist SOP Class as an SCP) is illustrated in the figure above:

4.2.2.3.1.2 Proposed Presentation Contexts

HS50 will propose Presentation Contexts as shown in the following table:

PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY WORKLIST UPDATE								
	Presentation Context Table							
Abstract Syntax Transfer Syntax Role								
Name	UID	Name List UID List			Neg.			
Modality Worklist	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None			
Information	5.1.4.31	Explicit VR Little Endian	1.2.840.10008. 1.2.1					
Model - FIND								

Table 4.2-22PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY WORKLIST UPDATE

4.2.2.3.1.3 SOP Specific Conformance for Modality Worklist

The behavior of HS50 when encountering status codes in a Modality Worklist C-FIND response is summarized in the Table below. If any other SCP response status than "Success" or "Pending" is received by HS50, a message "Query failed" will appear on the user interface.

Table 4.2-23

MODALITY WORKLIST C-FIND RESPONSE STATUS HANDLING BEHAVIOR Service Error **Further Meaning Behavior** Status Code The SCP has Completed the operation 0000 Success Matching is complete successfully. Pending **FF00** Continue. Matches are continuing Matches are continuing -Warning that one or more Pending **FF01** Continue. Optional Keys were not supported Any other The Association is aborted using A-Abort and the * * status Worklist is marked as failed code.

The behavior of HS50 during communication failure is summarized in the Table below.

Table 4.2-24 MODALITY WORKLIST COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior			
Timeout	The Association is aborted using A-ABORT and			
	the worklist query is marked as failed.			
Association aborted by the SCP or network layers	The Worklist query is marked as failed.			

Acquired images will always use the Study Instance UID specified for the Scheduled Procedure Step (if available). If an acquisition is unscheduled, a Study Instance UID will be generated locally.

The Table below provides a description of the HS50 Worklist Request Identifier and specifies the attributes that are copied into the images. Unexpected attributes returned in a C-FIND response are ignored.

Requested return attributes not supported by the SCP are set to have no value. Non-matching responses returned by the SCP due to unsupported optional matching keys are ignored. No attempt is made to filter out possible duplicate entries.

Module Name	Tag	VR	м	R	Q	D	IOD		
Attribute Name	Tag	VIX			S.				
Scheduled Procedure Step									
Scheduled Procedure Step Sequence	0040,0100	SQ		x					
> Scheduled Station AET	0040,0001	AE	(S)	х	x				
> Scheduled Procedure Step Start Date	0040,0002	DA	S,R	х	x	x			
> Scheduled Procedure Step Start Time	0040,0003	ТМ		x					
> Modality	0008,0060	CS	S	x	x				
> Scheduled Performing Physician's Name	0040,0006	PN		x		x			
> Scheduled Procedure Step Description	0040,0007	LO		х		х	х		
> Scheduled Station Name	0040,0010	SH	S	х	х				
> Scheduled Procedure Step Location	0040,0011	SH		х					
> Requested Contrast Agent	0032,1070	LO		x					
> Scheduled Protocol Code Sequence	0040,0008	SQ		x			х		
> Scheduled Procedure Step ID	0040,0009	SH		х			x		
Requested Procedure									
Requested Procedure ID	0040,1001	SH	S	х	х		х		
Requested Procedure Description	0032,1060	LO		х					
Study Instance UID	0020,000D	UI		х			x		
Requested Procedure Comments	0040,1400	LT		x					
Referenced Study Sequence	0008,1110	SQ		х					
Requested Procedure Code Sequence	0032,1064	SQ		х					
Names of Intended Recipients of Results	0040,1010	PN		х					
Imaging Service Request									
Accession Number	0008,0050	SH	S	х	x	x	x		
Requesting Physician	0032,1032	PN		х					
Referring Physician's Name	0008,0090	PN		х		х	x		
Visit Status									
Current Patient Location	0038,0300	LO		x					
Patient Identification									

Table 4.2-25 WORKLIST REQUEST IDENTIFIER

Patient's Name	0010.0010	PN	S	x	x	x	x
Patient ID	0010,0020	LO	S	x	x	x	x
Other Patient IDs	0010,1000	LO		x			
Patient Demographic							
Patient's Birth Date	0010,0030	DA		х		x	x
Patient's Sex	0010,0040	CS		х		х	x
Patient's Size	0010,1020	DS		х		х	x
Patient's Weight	0010,1030	DS		х		х	x
Ethnic Group	0010,2160	SH		х			
Patient Comments	0010,4000	LT		х			
Patient Medical							
Medical Alerts	0010,2000	LO		х			
Additional Patient History	0010,21B0	LT		x		x	
Pregnancy Status	0010,21C0	US		x			
Last Menstrual Date	0010,21D0	DA		x		x	x

The above table should read as follows:

Module Name:	The Name of the associated module for supported worklist attributes.
Attribute Name:	Attributes supported to build an HS50 Worklist Request Identifier.
Tag:	DICOM tag for this attribute.

VR: DICOM VR for this attribute.

- Matching keys for (automatic) Worklist Update. An "S" indicates that HS50 supplies an attribute M: value for Single Value Matching or additional specific tags indicated by "(S)"; an "R" will indicate Range Matching.
- R: Return keys. An "X" will indicate that HS50 will supply this attribute as Return Key with zero length for Universal Matching.
- Interactive Query Key. An "X" will indicate that HS50 will supply this attribute as matching key, if Q: entered in the Setup Dialog.
- Displayed keys. An "X" indicates that this worklist attribute is displayed to the user during a D: patient registration dialog.
- IOD: An "X" indicates that this Worklist attribute is included into all Object Instances created during performance of the related Procedure Step.

4.2.2.3.2 Activity – Acquire Images

4.2.2.3.2.1 Description and Sequencing of Activities

An Association to the configured MPPS SCP system is established immediately after the first SOP Instance is acquired to send the MPPS N-Create message.

The "End Exam" button causes a message box in which a user can select "COMPLETED" or "DISCONTINUED" as a MPPS final state. An exam for which an MPPS instance is sent with a state of "COMPLETED" or "DISCONTINUED" can no longer be updated.

The HS50 will support creation of "unscheduled cases" by allowing MPPS Instances to be communicated for locally registered Patients.

The HS50 supports a 1-to-N relationship between Scheduled and Performed Procedure Steps.

HS50 will initiate an Association to issue an:

- N-CREATE request according to the CREATE Modality Performed Procedure Step SOP Instance operation, or an:
- N-SET request to update the contents and state of the MPPS according to the SET Modality Performed Procedure Step Information operation.

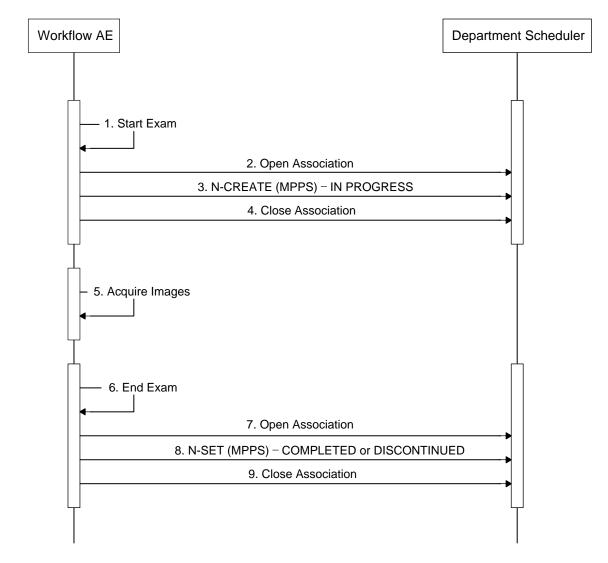


Figure 4.2-4 SEQUENCING OF ACTIVITY - ACQUIRE IMAGES

A possible sequence of interactions between the Workflow AE and a Departmental Scheduler (e.g. a device such as a RIS or HIS which supports the MPPS SOP Class as an SCP) is illustrated in the figure above:

4.2.2.3.2.2 Proposed Presentation Contexts

HS50 will propose Presentation Contexts as shown in the following table:

Table 4.2-26

PROPOSED PRESENTATION CONTEXTS FOR REAL-WORLD ACTIVITY ACQUIRE IMAGES

Presentation Context Table							
Abstract Syntax Transfer Syntax							
Name	UID	Name List UID List			Neg.		
Modality Performed	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None		
Procedure Step	3.1.2.3.3	Explicit VR Little Endian	1.2.840.10008. 1.2.1				

4.2.2.3.2.3 SOP Specific Conformance for MPPS

The behavior of HS50 when encountering status codes in an MPPS N-CREATE or N-SET response is summarized in the Table below. If any other SCP response status than "Success" or "Warning" is received by HS50, a message "MPPS failed" will appear on the user interface.

Table 4.2-27 MPPS N-CREATE / N-SET RESPONSE STATUS HANDLING BEHAVIOR

Service Status	Further Meaning	Error Code	Behavior	
Success	Success	0000	The SCP has Completed the operation successfully.	
Warning	Attribute Value Out of Range	0116H	The MPPS Operation is considered successful.	
*	*	Any other status code.	The Association is aborted using A-Abort and the MPPS is marked as failed	

The behavior of HS50 during communication failure is summarized in the table below:

MPPS COMMUNICATION FAILURE BEHAVIOR					
Exception	Behavior				
Timeout	The Association is aborted using A-ABORT and				
	the MPPS job is marked as failed.				
Association aborted by the SCP or network layers	The MPPS job is marked as failed.				

Table 4.2-28 MPPS COMMUNICATION FAILURE BEHAVIOR

Table 4.2-29 provides a description of the MPPS N-CREATE and N-SET request identifiers send by HS50. Empty cells in the N-CREATE and N-SET columns indicate that the attribute is not sent.

MIPPS N-CREATE / N-SET REQUEST IDENTIFIER								
Attribute Name	Тад	VR	N-CREATE	N-SET				
Specific Character Set	0008,0005	CS	Ref. Section 6 SUPPORT OF CHARACTER SETS					
Performed Procedure Step Relationship								
Scheduled Step Attribute Sequence	0040,0270	SQ						
> Study Instance UID	0020,000D	UI	From MWL or generated by device					
> Referenced Study Sequence	0008,1110	SQ	From MWL					
>> Referenced SOP Class UID	0008.1150	UI	From MWL					
>> Referenced SOP Instance UID	0008,1155	UI	From MWL					
> Accession Number	0008,0050	SH	From MWL or user input					
> Requested Procedure ID	0040,1001	SH	From MWL					
 Requested Procedure Description 	0032,1060	LO	From MWL					
 Scheduled Procedure Step ID 	0040,0009	SH	From MWL					
 Scheduled Procedure Step Description 	0040,0007	LO	From MWL					
 Scheduled Protocol Code Sequence 	0040,0008	SQ	From MWL					
>> Code Value	0008,0100	SH	From MWL					
>> Coding Scheme Designator	0008,0102	SH	From MWL					
>> Coding Scheme Version	0008,0103	SH	From MWL					
>> Code Meaning	0008,0104	LO	From MWL					
Patient's Name	0010,0010	PN	From MWL or user input					
Patient ID	0010,0020	LO	From MWL or user input					
Patient's Birth Date	0010,0030	DA	From MWL or user input					
Patient's Sex	0010,0040	CS	From MWL or user input					

Table 4.2-29 MPPS N-CREATE / N-SET REQUEST IDENTIFIER

Referenced Patient Sequence	0008,1120	SQ	Zero length					
> Referenced SOP Class UID	0008,1150	UI	Zero length					
> Referenced Instance UID	0008,1155	UI	Zero length					
Performed Procedure Step Information								
			Generated by device					
Performed Procedure Step ID	0040,0253	SH	(Study Date + Study					
			Time)					
Performed Station AE Title	0040,0241	AE	From Modality Setup					
Performed Station Name	0040,0242	SH	From Modality Setup					
Performed Location	0040,0243	SH	Zero length					
Performed Procedure Step	0040.0044							
Start Date	0040,0244	DA	Actual Start Date					
Performed Procedure Step		-						
Start Time	0040,0245	ТМ	Actual Start Time					
Performed Procedure Step			"IN PROGRESS"	"COMPLETED" or				
Status	0040,0252	CS		"DISCONTINUED"				
			From MWL or user input	From MWL or user input				
Performed Procedure Step	0040,0254	LO	(Same as Study	(Same as Study				
Description			Description)	Description)				
Performed Procedure Type	0040,0255	LO	Zero length	Zero length				
Description								
Procedure Code Sequence	0008,1032	SQ	From MWL	From MWL				
> Code Value	0008,0100	SH	From MWL	From MWL				
> Coding Scheme Designator	0008,0102	SH	From MWL	From MWL				
> Coding Scheme Version	0008,0103	SH	From MWL	From MWL				
> Code Meaning	0008,0104	LO	From MWL	From MWL				
Performed Procedure Step End			7 1 11					
Date	0040,0250	DA	Zero length	Actual End Date				
Performed Procedure Step End	0040.0054	T 1 4	Zana lana ti					
Time	0040,0251	ТМ	Zero length	Actual End Time				
Performed Procedure Step				Used when Performed				
Discontinuation Reason Code	0040,0281	SQ		Procedure Step Status				
Sequence				is "DISCONTINUED"				
> Code Value	0008,0100	SH		From User Select				

> Coding Scheme Designator	0008,0102	SH		From User Select
> Coding Scheme Version	0008,0103	SH		
> Code Meaning	0008,0104	LO		From user select
	Image	Acqui	sition Results	
Modality	0008,0060	CS	"US"	
Study ID	0020,0010	SH	Requested Procedure ID or Generated by device (Study Date + Study Time)	
Performed Protocol Code Sequence	0040,0260	SQ	Zero length or Scheduled Protocol Code Sequence	
Performed Series Sequence	0040,0340	SQ	Zero length	One or more items
> Performing Physician's Name	0008,1050	PN		From MWL or user input
> Protocol Name	0018,1030	LO		"FreeForm"
> Operator's Name	0008,1070	PN		From user input
> Series Instance UID	0020,000E	UI		Generated by device
> Series Description	0008,103E	LO		Zero length
> Retrieve AE Title	0008,0054	AE		Zero length
> Referenced Image Sequence	0008,1140	SQ		From Modality
>> Referenced SOP Class UID	0008,1150	UI		From Modality
>> Referenced SOP Instance UID	0008,1155	UI		From Modality
 Referenced Non-Image Composite SOP Instance Sequence 	0040,0220	SQ		From Modality
>> Referenced SOP Class UID	0008,1150	UI		From Modality
>> Referenced SOP Instance UID	0008,1155	UI		From Modality

4.2.2.4 Association Acceptance Policy

The Workflow Application Entity does not accept Associations.

4.2.3 Hardcopy Application Entity Specification

4.2.3.1 SOP Classes

HS50 provides Standard Conformance to the following SOP Classes:

Table 4.2-30SOP CLASSES FOR AE HARDCOPY

SOP Classes	SOP Class UID	SCU	SCP
Basic Grayscale Print Management Meta	1.2.840.10008.5.1.1.9	Yes	No
Basic Color Print Management Meta	1.2.840.10008.5.1.1.18	Yes	No

4.2.3.2 Association Policies

4.2.3.2.1 General

The DICOM standard application context name for DICOM 3.0 is always proposed:

Table 4.2-31

DICOM APPLICATION CONTEXT FOR AE HARDCOPY

Application Context Name	1.2.840.10008.3.1.1.1
--------------------------	-----------------------

4.2.3.2.2 Number of Association

HS50 can initiate one or more Associations at a time for each destination to which a transfer request is being processed in the active job queue list.

Table 4.2-32

NUMBER OF ASSOCIATIONS INITIATED FOR AE HARDCOPY

Maximum number of simultaneous Associations	Unlimited (number of configured		
	hardcopy devices)		

4.2.3.2.3 Asynchronous Nature

HS50 does not support asynchronous communications (multiple outstanding transactions over a single Association)

Table 4.2-33

ASYNCHRONOUS NATURE AS A SCU FOR AE HARDCOPY

Maximum number of outstanding asynchronous transactions	1
---------------------------------------------------------	---

4.2.3.2.4 Implementation Identifying Information

The implementation information for this Application Entity is:

Table 4.2-34 DICOM IMPLEMENTATION CLASS AND VERSION FOR AE HARDCOPY


Implementation Class UID	1.2.410.200001.101.11.501
Implementation Version Name	HS50


4.2.3.3 Association Initiation Policy

4.2.3.3.1 Activity – Film Images

4.2.3.3.1.1 Description and Sequencing of Activities

A user composes images onto film sheets and requests them to be sent to a specific hardcopy device. The user can select the desired film format and number of copies. Each print-job is forwarded to the job queue and processed individually.

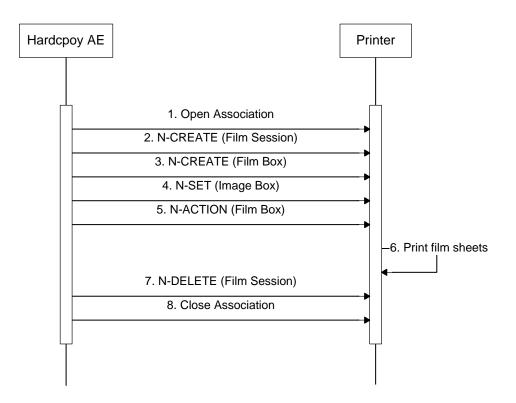



A typical sequence of DIMSE messages sent over an association between Hardcopy AE and a Printer is illustrated in the Figure above:

Association Initiation Policies for "Send on end exam", "Send after acquisition" and "Send manually" Mode are equal to the Sending images' of the Storage Application Entity. (See 4.2.1.3.1.1)

Status of the print-job is reported through the job control interface. One or more job can be active at a time for each separate hardcopy device. If any response from the remote Application contains a status other than Success or Warning, the Association is aborted and the related job is switched to a failed state. It can be restarted any time by user interaction or, if configured, by automated retry.

4.2.3.3.1.2 Proposed Presentation Contexts

HS50 is capable of proposing the Presentation Contexts shown in the Table below:

Table 4.2-35

PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY FILM IMAGES

Presentation Context Table							
Abstract Syntax		Transfer Syntax			Ext.		
Name	UID	Name List	UID List		Neg.		
Basic Grayscale Print	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None		
Management Meta	5.1.1.9	Explicit VR Little Endian	1.2.840.10008.1.2.1				
Basic Color Print	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None		
Management Meta	5.1.1.18	Explicit VR Little Endian	1.2.840.10008.1.2.1				

4.2.3.3.1.3 Common SOP Specific Conformance for all Print SOP Classes

The general behavior of Hardcopy AE during communication failure is summarized in the table below. This behavior is common for all SOP Classes supported by Hardcopy AE.

Table 4.2-36HARDCOPY COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior
Timeout	The Association is aborted using A-ABORT and
	the print job is marked as failed.
Association aborted by the SCP or network layers	The print job is marked as failed.

4.2.3.3.1.4 SOP Specific Conformance for the Film Session SOP Class

Hardcopy AE supports the following DIMSE operations for the Film Session SOP Class:

- N-CREATE
- N-DELETE

Details of the supported attributes and status handling behavior are described in the following subsections.

4.2.3.3.1.4.1 Film Session SOP Class Operations (N-CREATE)

The attributes supplied in an N-CREATE Request are listed in the Table below:

Table 4.2-37

Attribute Name	Тад	VR	Value	Presence of Value	Source
Number of Copies	2000,0010	IS	199	ALWAYS	USER
Print Priority	2000,0020	CS	HIGH, MED or LOW	ALWAYS	USER
Medium Type	2000,0030	cs	PAPER, CLEAR FILM, BLUE FILM, MAMMO CLEAR FILM or MAMMO BLUE FILM	ALWAYS	USER
Film Destination	2000,0040	CS	MAGAZINE or PROCESSOR	ALWAYS	USER

FILM SESSION SOP CLASS N-CREATE REQUEST ATTRIBUTES

The Behavior of Hardcopy AE when encountering status codes in an N-CREATE response is summarized in the table below:

Table 4.2-38

FILM SESSION SOP CLASS N-CREATE RESPONSE STATUS HANDLING BEHAVIOR

Service Status	Further Meaning	Error Code	Behavior
Success	Success	0000	The SCP has Completed the operation successfully.
Warning	Attribute Value Out of Range	0116H	System continues operations.
Warning	Attribute List Error	0107H	Same as above
*	*	Any other status code.	The Association is aborted using A-Abort and the print-job is marked as failed

4.2.3.3.1.4.2 Film Session SOP Class Operations (N-DELETE)

The behavior of Hardcopy AE when encountering status codes in an N-DELETE response is summarized in the Table below:

Table 4.2-39

PRINTER SOP CLASS N-DELETE RESONSE STATUS HANDLING BEHAVIOR

Success	Success	0000	The SCP has Completed the operation successfully.
*	*	Any other status code.	The Association is aborted using A-Abort and the print-job is marked as failed

4.2.3.3.1.5 SOP Specific Conformance for the Film Box SOP Class

Hardcopy AE supports the following DIMSE operations for the Film Box SOP Class:

- N-CREATE
- N-ACTION

Details of the supported attributes and status handling behavior are described in the following subsections.

4.2.3.3.1.5.1 Film Box SOP Class Operations (N-CREATE)

The attributes supplied in an N-CREATE Request are listed in the table below:

Table 4.2-40

FILM	BOX SOP C	LAS	S N-CREATE REQUEST ATTR	IBUTES	
Attribute Name	Tag	VR	Value	Presence	Source
Attribute Name	Tay	۷N	value	of Value	Source
Image Display Format	2010,0010	ST	Enumerated values used (user configurable): STANDARD\X,Y, where X and Y can take values from 1 to 5	ALWAYS	USER
Referenced Film Session Sequence	2010.0500	SQ		ALWAYS	AUTO
> Referenced SOP Class UID	0008,1150	UI	1.2.840.10008.5.1.1.1	ALWAYS	AUTO
 Referenced SOP Instance UID 	0008,1155	UI	From created Film Session SOP Instance	ALWAYS	AUTO

Film Orientation	2010,0040	CS	PORTRAIT or LANDSCAPE	ALWAYS	USER
			8INX10IN, 8_5INX11IN,		
			10INX12IN, 10INX14IN,		
	0040.0050	~~	11INX14IN, 11INX17IN,		
Film Size ID	2010,0050	CS	14INX14IN, 14INX17IN,	ALWAYS	USER
			24CMX24CM, 24CMX30CM,		
			A4, A3		
Magnification	2010 0000	~~	REPLICATE, BILINEAR,		
Туре	2010,0060	CS	CUBIC, NONE	ALWAYS	USER
Max Density	2010,0130	US	0 ~ 65535	ANAP	USER
Configuration	2010 0150	ST	Values are defined in Print	ANAP	USER
Information	2010,0150	51	Conformance Statement	ANAP	USER
	2010 0020	CS	Values are defined in Print	ANAP	USER
Smoothing Type	2010,0080	US	Conformance Statement	ANAP	USER
Border Density	2010,0100	CS	BLACK or WHITE	ALWAYS	USER
Empty Image	2010 0110	66			
Density	2010,0110	CS	BLACK or WHITE	ALWAYS	USER
Min Density	2010,0120	US	0 ~ 65535	ANAP	USER

The behavior of Hardcopy AE when encountering status codes in an N-CREATE responses is summarized in the table below:

FILM B	OX SOP CLASS N-CREAT	E RESP	ONSE STATUS HANDLING BEHAVIOR
Service		Error	Behavior
Status	Further Meaning	Code	Benavior
Success	Success	0000	The SCP has Completed the operation
			successfully.
Warning	Attribute Value Out of Range	0116H	System continues operations.
Warning	Attribute List Error	0107H	Same as above

Table 4.2-41 ILM BOX SOP CLASS N-CREATE RESPONSE STATUS HANDLING BEHAVIO

Warning	Requested Min Density or Max Density outside of printer's operating range	B605H	Same as above
*	*	Any other status code.	The Association is aborted using A-Abort and the print-job is marked as failed

4.2.3.3.1.5.2 Film Box SOP Class Operations (N-ACTION)

An N-ACTION Request is issued to instruct the Print SCP to print the contents of the Film Box.

The behavior of Hardcopy AE when encountering status codes in an N-ACTION responses is summarized in the table below:

FILN	BOX CLAS	SS N-ACTIO	N RESPONSE STATUS HANDLING BEHAVIOR
Service Status	Further Meaning	Error Code	Behavior
Success	Success	0000	The SCP has Completed the operation successfully.
*	*	Any other status code.	The Association is aborted using A-Abort and the print-job is marked as failed

Table 4.2-42

4.2.3.3.1.6 SOP Specific Conformance for the Film Box SOP Class

Hardcopy AE supports the following DIMSE operations for the Image Box SOP Class:

- N-SET

Details of the supported attributes and status handling behavior are described in the following subsections.

4.2.3.3.1.6.1 Image Box SOP Class Operations (N-SET)

The attributes supplied in an N-SET Request are listed in the Table below:

HS50 DICOM Conformance Statement

Attribute Name	Tag	VR	Value	Presence of Value	Source
Image Position	2020,0010	US	1 N (N = Row * Column of Film Box)	ALWAYS	AUTO
Basic Grayscale Image Sequence	2020,0110	SQ		ALWAYS	AUTO
> Samples Per Pixel	0028,0002	US	1	ALWAYS	AUTO
> Photometric Interpretation	0028,0004	CS	MONOCHROME2	ALWAYS	AUTO
> Rows	0028,0010	US	Number of Row Pixels of Image	ALWAYS	AUTO
> Columns	0028,0011	US	Number of Column Pixels of Image	ALWAYS	AUTO
> Bits Allocated	0028,0100	US	8	ALWAYS	AUTO
> Bits Stored	0028,0101	US	8	ALWAYS	AUTO
> High Bit	0028,0102	US	7	ALWAYS	AUTO
> Pixel Representation	0028,0103	US	0	ALWAYS	AUTO
> Pixel Data	7FE0,0010	OB	Pixels of Image	ALWAYS	AUTO

Table 4.2-43

BASIC GRAYSCALE IMAGE BOX SOP CLASS N-SET REQUEST ATTRIBUTES

Table 4.2-44

BASIC COLOR IMAGE BOX SOP CLASS N-SET REQUEST ATTRIBUTES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Image Position	2020,0010	US	1 N (N = Row * Column of Film Box)	ALWAYS	AUTO
> Samples Per Pixel	0028,0002	US	3	ALWAYS	AUTO
> Photometric Interpretation	0028,0004	CS	RGB	ALWAYS	AUTO
> Planar Configuration	0028,0006	US	1	ALWAYS	AUTO
> Rows	0028,0010	US	Number of Row Pixels of Image	ALWAYS	AUTO
> Columns	0028,0011	US	Number of Column Pixels of	ALWAYS	AUTO

			Image		
> Bits Allocated	0028,0100	US	8	ALWAYS	AUTO
> Bits Stored	0028,0101	US	8	ALWAYS	AUTO
> High Bit	0028,0102	US	7	ALWAYS	AUTO
> Pixel	0029 0102	US	0	ALWAYS	AUTO
Representation	0028,0103	03	0	ALWATS	AUTO
> Pixel Data	7FE0,0010	OB	Pixels of Image	ALWAYS	AUTO

The behavior of Hardcopy AE when encountering status codes in an N-SET response is summarized in the table below:

Table 4.2-45IMAGE BOX SOP CLASS N-SET RESPONSE STATUS HANDLING BEHAVIOR

Service	Further	Error	Behavior
Status	Meaning	Code	Bellaviol
Success	Success	0000	The SCP has Completed the operation successfully.
*	*	Any other status code.	The Association is aborted using A-Abort and the print-job is marked as failed

4.2.3.4 Association Acceptance Policy

The Hardcopy Application Entity does not accept Associations.

4.2.4 Q/R Application Entity Specification

4.2.4.1 SOP Classes

HS50 provides Standard Conformance to the following SOP Classes:

Table 4.2-46 SOP CLASSES FOR AE Q/R

SOP Classes	SOP Class UID	SCU	SCP
Study Root Information Model- FIND	1.2.840.10008.5.1.4.1.2.2.1	Yes	No
Study Root Information Model- MOVE	1.2.840.10008.5.1.4.1.2.2.2	Yes	No

4.2.4.2 Association Establishment Policy

4.2.4.2.1 General

The DICOM standard application context name for DICOM 3.0 is always proposed.

Table 4.2-47DICOM APPLICATION CONTEXT FOR AE Q/R

Application Context Name 1.2.840.10008.3.1.1.1

4.2.4.2.2 Number of Associations

HS50 initiates one Association at a time for a Q/R request.

Table 4.2-48

NUMBER OF ASSOCIATIONS INITIATED FOR AE Q/R

4.2.4.2.3 Asynchronous Nature

HS50 does not support asynchronous communications (multiple outstanding transactions over a single Association)

Table 4.2-49ASYNCHRONOUS NATURE AS A SCU FOR AE Q/R

Maximum number of outstanding asynchronous transactions	1	
---------------------------------------------------------	---	--

4.2.4.2.4 Implementation Identifying Information

The implementation information for this Application Entity is:

Table 4.2-50

DICOM IMPLEMENTATION CLASS AND VERSION FOR AE Q/R

Implementation Class UID	1.2.410.200001.101.11.501
Implementation Version Name	HS50

4.2.4.3 Association Initiation Policy

4.2.4.3.1 Activity – Query study or series

4.2.4.3.1.1 Description and Sequencing of Activities

The Query attempts to initiate a new association when the user selects Query from the user interface.

When the Query is requested, the data from the user interface will be inserted as matching keys into the query form. When the request is initiated, the HS50 will build an identifier for the C-FIND request, and it will initiate an association to send the request and will wait for Query responses. The results will be diaplayed in a study or series list.

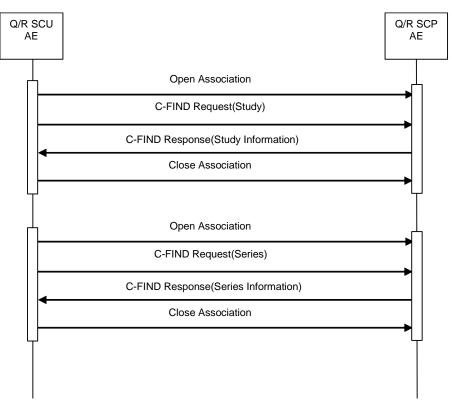


Figure 4.2-6 SEQUENCING OF ACTIVITY - HANDLING QUERY STUDY OR SERIES

4.2.4.3.1.2 Proposed Presentation Contexts

HS50 will propose Presentation Contexts as shown in the following table:

Table 4.2-51PROPOSED PRESENTATION CONTEXTSFOR REAL-WORLD ACTIVITY QUERY STUDY OR SERIES

Presentation Context Table							
Abstract S	yntax	Transfer	Transfer Syntax				
Name	UID	Name List UID List			Neg.		
Study Root	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None		
Information Model-	5.1.4.1.2.2.1	Explicit VR Little Endian	1.2.840.10008. 1.2.1	SCU	None		
FIND		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCU	None		

4.2.4.3.1.3 SOP Specific Conformance for Query SOP Classes

The behavior of the HS50 when encountering status codes in the Query C-FIND response is summarized in the table below. If any SCP response status other than "Successful" or "Pending" is received by HS50, the message "Query failed" will appear in the user interface.

Table 4.2-52

QUERY C-FIND RESPONSE STATUS HANDLING BEHAVIOR

Service Status	Further Meaning	Error Code	Behavior
Successful	Matching is complete	0000	The SCP has completed the operation successfully.
Pending	Matches are continuing	FF00	The query is still ongoing.
Pending	Matches are continuing - Warning that one or more Optional Keys were not supported	FF01	The query is still ongoing.
*	*	Any other status code.	The association is aborted using A-Abort and the Query is marked as failed.

The behavior of the HS50 during communication failure is summarized in the table below:

Table 4.2-53QUERY COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior
Time Out	The association is aborted using A-ABORT and
	the query is marked as failed.
Association aborted by the SCP or network layers	The study or series query is marked as failed.

The system actually performs a number of C-FIND requests at multiple levels in the DICOM object hierarchy to get the data it requires to display studies or series. Table 4.2-54 provides a description of the query request identifiers.

Table 4.2-54 QUERY REQUEST IDENTIFIER FOR FIND-SCU

Attribute Name	Тад	VR	м	R	Q	D	
STUDY Level							
Query/Retrieve Level	0008,0052	CS	S	х	х		
Patient's ID	0010,0020	LO	S	х	х	x	
Patient's Name	0010,0010	PN	S	х	х	x	
Study Description	0008,1030	LO		х		x	
Modalities In Study	0008,0061	CS		х		x	
Study Date	0008,0020	DA	S,R	х	х	x	
Study Time	0008,0030	ТМ		х			
Accession Number	0008,0050	SH		х	х	x	
Study Instance UID	0020,000D	UI		х			
Study ID	0020,0010	SH		х			
Referring Physician's Name	0008,0090	PN		х			
Number of Study Related Series	0020,1206	IS		х		x	
SERIES Level							
Query/Retrieve Level	0008,0052	CS	S	х	х		
Series Number	0020,0011	IS		х		x	
Series Description	0008,103E	LO		х		x	
Modality	0008,0060	CS		х		x	
Series Date	0008,0021	DA		х		x	
Performed Procedure Step Start Date	0040,0244	DA		х			
Series Instance UID	0020,000E	UI		x			

Study Instance UID	0020,000D	UI	S		х		
Number of Series Related Instances	0020,1209	IS		х		x	

The table above should read as follows:

Attribute Name:	Supported attributes that can build an HS50 Query Request Identifier.
Tag:	DICOM tag for this attribute.
VR: DICOM	VR for this attribute.
M: Matchin	g keys for (automatic) Query. An "S" indicates that the HS50 can supply an attribute value
for Sing	le Value Matching or additional specific tags indicated by "(S)"; an "R" indicates Range
Matchin	ıg.
R: Return I	keys. An "X" indicates that the HS50 will supply this attribute as the Return Key with zero
length fo	or Universal Matching.
Q: Interacti	ive Query Key. An "X" indicates that the HS50 will supply this attribute as a matching key,
if entere	ed in the Setup Dialog.
	ad kave. An "X" indicates that this Quary attribute is displayed to the user during a patient

D: Displayed keys. An "X" indicates that this Query attribute is displayed to the user during a patient registration dialog.

4.2.4.3.2 Activity – Retrieve series

4.2.4.3.2.1 Description and Sequencing of Activities

The retrieval function attempts to initiate a new association when the user selects Retrieve in the user interface.A single attempt will be made to retrieve the entity (series) from the selected Q/R AE. If retrieval fails, for whatever reason, no reattempt will be performed.

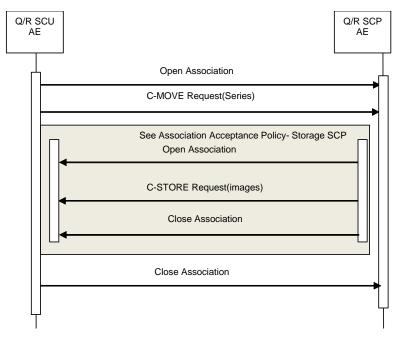


Figure 4.2-7

SEQUENCING OF ACTIVITY – HANDLING RETRIEVE SERIES

4.2.4.3.2.2 Proposed Presentation Contexts

HS50 will propose Presentation Contexts as shown in the following table:

Table 4.2-55

PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY RETRIEVE SERIES

Presentation Context Table							
Abstract	Syntax	Transfer	Transfer Syntax				
Name	UID	Name List UID List			Neg.		
Study Root	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None		
Information	5.1.4.1.2.2.2	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None		
Model- MOVE		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None		

4.2.4.3.2.3 SOP Specific Conformance for Retrieval SOP Classes

The behavior of the HS50 when encountering status codes in Retrieve C-MOVE response is summarized in the table below. If any SCP response status other than "Successful" or "Pending" is received by the HS50, a "failed" message will appear on the user interface.

Service Status	Further Meaning	Error Code	Behavior
Successful	Sub-operations complete – no failures detected	0000	All the Composite SOP Instances have been successfully sent to the C-MOVE Destination AE.
Pending	Sub-operations are still ongoing	FF00	A response with this status code is sent every time a Composite SOP Instance has been successfully sent to the C-MOVE Destination AE.
*	*	Any other status code.	The association is aborted using A-Abort and the retrieval is marked as failed

Table 4.2-56 RETRIEVE C-MOVE RESPONSE STATUS HANDLING BEHAVIOR

The behavior of the HS50 during communication failure is summarized in the table below.

Table 4.2-57

RETRIEVE COMMUNICATION FAILURE BEHAVIOR

Exception	Behavior
Timeout	The association is aborated using A-ABORT
	and the retireval job is marked as failed.
Association aborted by the SCP or network layers	The retrieval is marked as failed.

Table 4.2-58

RETREIVE REQUEST IDENTIFIER FOR MOVE-SCU

Attribute Name	Tag	VR	м	R	Q	D
Query/Retrieve Level	0008,0052	CS	S		х	
Study Instance UID	0020,000D	UI	S		x	
Series Instance UID	0020,000E	UI	S		x	

4.2.4.1 Association Acceptance Policy

The Q/R Application Entity does not accept associations.

4.2.5 STORAGE-SCP Application Entity Specification

4.2.5.1 SOP Classes

The HS50 provides Standard Conformance to the following SOP Classes. Provide Storage SCP only Q/R service running.

SOP Classes	SOP Class UID	SCU	SCP
Verification	1.2.840.10008.1.1	Yes	Yes
US Image Storage	1.2.840.10008.5.1.4.1.1.6.1	No	Yes
US Multi-frame Storage	1.2.840.10008.5.1.4.1.1.3.1	No	Yes
CT Image Storage	1.2.840.10008.5.1.4.1.1.2	No	Yes
MR Image Storage	1.2.840.10008.5.1.4.1.1.4	No	Yes
MG present Image Storage	1.2.840.10008.5.1.4.1.1.1.2	No	Yes
MG Process Image Storage	1.2.840.10008.5.1.4.1.1.1.2.1	No	Yes
DX present Image Storage	1.2.840.10008.5.1.4.1.1.1.1	No	Yes
DX process Image Storage	1.2.840.10008.5.1.4.1.1.1.1.1	No	Yes
Standard PET Image Storage	1.2.840.10008.5.1.4.1.1.128	No	Yes
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7	No	Yes

Table 4.2-59 SOP CLASSES FOR AE STORAGE-SCP

4.2.5.1 Association Establishment Policy

4.2.5.1.1 General

The DICOM standard application context name for DICOM 3.0 is always proposed.

Table 4.2-60
DICOM APPLICATION CONTEXT FOR AE STORAGE-SCP

Application Context Name	1.2.840.10008.3.1.1.1
--------------------------	-----------------------

4.2.5.1.2 Number of Associations

The STORAGE-SCP AE can support multiple simultaneous associations requested by AEs. Each time the STORAGE-SCP AE receives an association request, a child process will be spawned to process the storage.

Table 4.2-61

NUMBER OF ASSOCIATIONS INITIATED FOR AE STORAGE-SCP

Maximum number of simultaneous Associations	Unlimited

4.2.5.1.3 Implementation Identifying Information

The implementation information for this Application Entity is:

Table 4.2-62

DICOM IMPLEMENTATION CLASS AND VERSION FOR AE STORAGE-SCP

Implementation Class UID	1.2.410.200001.101.11.501	
Implementation Version Name	HS50	

4.2.5.2 Association Initiation Policy

The STORAGE-SCP Application Entity does not initiate associations.

4.2.5.3 Association Acceptance Policy

4.2.5.3.1 Activity – Receive Images

4.2.5.3.1.1 Description and Sequencing of Activities

The STORAGE-SCP AE accepts associations only if they have valid Presentation Contexts. The STORAGE-SCP AE does not have a limit on the number of associations used to send images to it. Images belonging to more than one series can be sent over a single or multiple associations. Images belonging to a single Series can also be sent via different associations.

4.2.5.3.1.2 Proposed Presentation Contexts

The HS50 will propose Presentation Contexts as shown in the following table:

Table 4.2-63PROPOSED PRESENTATION CONTEXTS FOR ACTIVITY RECEIVE IMAGES

Presentation Context Table					
Abstract Syntax Transfe		Syntax	Role	Ext.	
Name	UID	Name List UID List			Neg.
US Image	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Storage	5.1.4.1.1.6.1	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
US Multi-frame	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Storage	5.1.4.1.1.3.1	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
CT Image	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Storage	5.1.4.1.1.2	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian 1.2.840.10008.1.2.2		SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
MR Image	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Storage	5.1.4.1.1.4	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
MG present	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Image Storage	5.1.4.1.1.1.2	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
MG Process	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Image Storage	5.1.4.1.1.1.2.1	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
DX present	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Image Storage	5.1.4.1.1.1.1	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None

		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
DX process	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Image Storage	5.1.4.1.1.1.1.1	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
Standard PET	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Image Storage	5.1.4.1.1.128	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None
Secondary	1.2.840.10008.	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
Capture Image	5.1.4.1.1.7	Explicit VR Little Endian	1.2.840.10008.1.2.1	SCP	None
Storage		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCP	None
		JPEG Baseline(Process 1)	1.2.840.10008.1.2.4.50	SCP	None

4.2.5.3.1.3 SOP Specific Conformance for Storage SOP Classes

The behavior response of the HS50 when encountering status codes in C-STORE is summarized in the table below. If any SCP response status other than "Successful" is received by the HS50 it is marked as failed.

Table 4.2-64

C-STORE RESPONSE STATUS HANDLING BEHAVIOR

Service Status	Further Meaning	Error Code	Behavior
Successful	Successfully stored the SOP instance.	0000	The SCP has successfully stored the SOP Instance. If all SOP Instances succeed, the job is marked as complete.
*	*	Any other status code.	The association is aborted using A-Abort and the request to receive the image is marked as failed.

4.3 NETWORK INTERFACE

4.3.1 Physical Network Interface

HS50 supports a single network interface. One of the following physical network interfaces will be available depending on hardware options installed:

Table 4.3-1 SUPPORTED PHYSICAL NETWORK INTERFACES

Ethernet 100baseT	
Ethernet 10baseT	

4.4 CONFIGURATION

4.4.1 AE Title/Presentation Address Mapping

4.4.1.1 Local AE Titles

All local applications use the AE Titles and TCP/IP Ports configured via the Setup/Connectivity/DICOM Menu. All local DICOM services use the same AE Title. The system listens for Verification requests and Commitment reports on the configured Port.

4.4.1.2 Remote AE Title/Presentation Address Mapping

The AE Title, host names and port numbers of remote applications are configured using the HS50 Setup/ Connectivity/DICOM Menu.

4.4.1.2.1 Storage

The Add button on the HS50 Setup/Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote Image Storage SCPs. Multiple remote Image Storage SCPs can be defined.

The Add button on the HS50 Setup/ Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote Structured Report Storage SCP. Only a single remote Structured Report

Storage SCP can be defined.

The Add button on the HS50 Setup/Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote Storage Commitment SCP. Only a single remote Storage Commitment SCP can be defined and only one Image Storage SCP can be assigned for Storage Commitment.

4.4.1.2.2 Workflow

The Add button on the HS50 Setup/Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote Modality Worklist SCP. Only a single remote Modality Worklist SCP can be defined.

The Add button on the HS50 Setup/Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote MPPS SCP. Only a single remote MPPS SCP can be defined.

4.4.1.2.3 Hardcopy

The Add button on the HS50 Setup/Connectivity/DICOM Menu must be used to set the AE Titles, port-numbers, IP addresses and capabilities for the remote Print SCPs. Multiple remote Print SCPs can be defined.

4.4.2 Parameters

A number of parameters related to acquisition and general operation can be configured using the Setup/Connectivity/DICOM Menu. The Table below only shows those configuration parameters relevant to DICOM communications. See the HS50 Manual for details on general configuration capabilities.

Parameter	Configurab	Default Value		
	le			
	(Yes/No)			
Local System Parameters				
AE Title (Local System AE Title)	Yes	"MEDISON"		
Station Name	Yes	"Set Station Name"		

Table 4.4-1 CONFIGURATION PARAMETERS TABLE

Port No. (Local Port Number)	Yes	1005
SR Format	Yes	General Report
Store SR at End of Exam	Yes	UnChecked
	mmon Parameters	
Alias	Yes	Blank
AE Title	Yes	Blank
Host	Yes	Blank
Port No.	Yes	104
Retry Interval	Yes	30 Sec.
Connect Timeout	Yes	30 Sec.
Retry Interval	Yes	30 Sec
Maximum Retires	Yes	1
Packet Size	Yes	16000
Storag	e Parameters	
Transfer Mode	Yes	"Send on end exam"
Include 3D Volume	Yes	Unchecked
Include Multi Frame	Yes	Checked
Convert to Grayscale	Yes	"No Conversion"
Single Frame Compression	Yes	JPEG Baseline / Low
Multi Frame Compression	Yes	JPEG Baseline / Low
Multi Frame Frame Rate	Yes	Full (30)
Multi Frame Frame Image Size	Yes	Original
Include Pixel Spacing	Yes	Unchecked
Window Center (VOI LUT)	Yes	128
Window Width (VOI LUT)	Yes	256
Storage	SR Paramater	
Trasfer Mode	Yes	"Send on end exam"
Performed Proc	edure Step Parameters	
Always complete exams	Yes	Checked
Storage Com	mitment Parameters	·
Associated Storage Server	Yes	None
Worklist Mo	odality Parameters	
Modality	Yes	"US"
Exam Description	Yes	"Requested Procedure
		Decription"

Print Parameters				
Transfer Mode	Yes	"Send on end exam"		
Color	Yes	"Grayscale"		
Medium Type	Yes	"BLUE FILM"		
Image Display Format	Yes	Row:2, Col:3		
Film Size	Yes	8 IN X 10 IN		
Orientation	Yes	"PORTRAIT"		
Destination	Yes	"MAGAZINE"		
Magnification	Yes	"NONE"		
Smoothing Type	Yes	Blank		
Border Density	Yes	"BLACK"		
Empty Density	Yes	"WHITE"		
Priority	Yes	"HIGH"		
Min Density	Yes	0		
Max Density	Yes	0		
Copies	Yes	1		
Configuration Info	Yes	Blank		

5 MEDIA INTERCHANGE

5.1 IMPLEMENTATION MODEL

5.1.1 Application Data Flow




Figure 5.1-1 APPLICATION DATA FLOW DIAGRAM FOR MEDIA STORAGE

- The Offline-Media Application Entity exports images and Structured Report to a Media Storage medium. It is associated with the local real-world activity "Export to Media", "Export to Media" is performed upon user request for selected studies.

5.1.2 Functional Definition of AEs

5.1.2.1 Functional Definition of Offline-Media Application Entity

Activation of the "Export to Media" menu entry will pass the currently selected studies to the Offline-Media Application Entity. The SOP Instances associated with the selection will be collected into one or more export jobs. The contents of each export job will be written to a single media.

5.1.3 Sequencing of Real-World Activities

At least one study must exist and be selected before the Offline-Media Application Entity can be invoked. The operator can insert a new media at any time before or after invocation of the Offline-Media Application Entity. If no media is available the export job can be cancelled immediately.

5.1.4 File Meta Information Options

The implementation written to the File Meta Header in each file is:

DICOM IMPLEMENTATION CLASS AND VERSION FOR MEDIA STORAGE

Implementation Class UID	1.2.410.200001.101.11.501
Implementation Version Name	HS50

5.2 AE SPECIFICATIONS

5.2.1 Offline-Media Application Entity Specification

The Offline-Media Application Entity provides standard conformance to the Media Storage Service Class. The Application Profiles and roles are listed below:

Tab	le	5.2-1	

APPLICATION PROFILES, ACTIVITIES AND ROLES FOR OFFLINE-MEDIA

Application Profiles Supported	Real World Activity	Role
STD-US-SC-MF-CDR	Export To Media	FSC, FSU
STD-US-SC-MF-DVD	Export To Media	FSC, FSU

5.2.1.1 File Meta Information for the Application Entity

The File-Set Identifier included in the File Meta Header is "MED_FSU".

5.2.1.2 Real-World Activities

5.2.1.2.1 Activity – Export to Media

The Offline-Media Application Entity acts as an FSC and FSU when requested to export SOP Instances from the local database to a media.

If the contents of the current selection do not fit on a single media, a separation into multiple export jobs which can be adapted by the user will be suggested.

The user will be prompted to insert a media for each export job. The contents of the export job will be written together with a corresponding DICOMDIR to a media. Writing in multi-session mode is supported.

5.2.1.2.1.1 Media Storage Application Profiles

The Offline-Media Application Entity supports the STD-US-SC-MF-CDR and STD-US-SC-MF-DVD Application Profile.

5.2.1.2.1.1.1 Options

The Media Application Entity supports the SOP Classes and Transfer Syntaxes listed in the table below:

IODS, SUP CLASSES AND TRANSPER STITTAKES FOR OFFLINE MEDIA							
Information Object	SOP Class UID	Transfer Syntax	Transfer Syntax UID				
Definition							
Media Storage Directory	1.2.840.10008.1.3.10	Explicit VR Little Endian	1.2.840.10008.1.2.1				
Storage							
US Image Storage	1.2.840.10008.5.1.4.1.1.6.1	Explicit VR Little Endian	1.2.840.10008.1.2.1				
US Multiframe Image	1.2.840.10008.5.1.4.1.1.3.1	JPEG Baseline Lossy	1.2.840.10008.1.2.4.50				
Storage		Compression					
Comprehensive Structured	1.2.840.10008.5.1.4.1.1.88.3	Explicit VR Little Endian	1.2.840.10008.1.2.1				
Report Storage	3						

Table 5.2-2IODS, SOP CLASSES AND TRANSFER SYNTAXES FOR OFFLINE MEDIA

6 SUPPORT OF CHARACTER SETS

All HS50 DICOM applications support the

ISO_IR 100 : Latin Alphabet No. 1 Supplementary set of ISO 8859 ISO 646

7 SECURITY

HS50 does not support any specific security measures.

It is assumed that HS50 is used within a secured environment. It is assumed that a secured environment includes as minimum:

a. Firewall or router protections to ensure that only approved external hosts have network access to HS50.

b. Firewall or router protections to ensure that HS50 has only network access to approved external hosts and services.

c. Any communication with external hosts and services outside the locally secured environment use appropriately secure network channels (e.g. such as a Virtual Private Network (VPN).

Other network security procedures such as automated intrusion detection may be appropriate in some environments. Additional security features may be established by the local security policy and are beyond the scope of this conformance statement.

8 ANNEXES

8.1 IOD CONTENTS

8.1.1 Created SOP Instances

Table 8.1-1 specifies the attributes of an Ultrasound Image transmitted by the HS50 storage applications.

8.1-3 specifies the attributes of a Comprehensive Structured Reports transmitted by the HS50 storage applications.

The following tables use a number of abbreviations. The abbreviations used in the "Presence of..." column are:

VNAP	Value Not Always Present (attribute sends zero length if no value is present)
ANAP	Attribute Not Always Present
ALWAYS	Always Present
EMPTY	Attribute is sent without a value

The abbreviations used in the "Source" column:

MWL	the attribute value source Modality Worklist
USER	the attribute value source is from User input
AUTO	the attribute value is generated automatically
MPPS	the attribute value is the same as the Modality Performed Procedure Step service
CONFIG	the attribute value source is a configurable parameter

NOTE: All dates and times are encoded in the local configured calendar and time. Date, Time and Time zones are configured using the Setup Menu.

8.1.1.1 US or US Multiframe Image IOD

IOD OF CREATED US OR US MULTIFRAME SOP INSTANCES					
IE	Module	Reference	Presence of Module		
Patient	Patient	Table 8.1-4	ALWAYS		
Study.	General Study	Table 8.1-5	ALWAYS		
Study	Patient Study	Table 8.1-6	ALWAYS		

Table 8.1-1 IOD OF CREATED US OR US MULTIFRAME SOP INSTANCES

Series	General Series	Table 8.1-7	ALWAYS
Equipment	General Equipment	Table 8.1-8	ALWAYS
	General Image	Table 8.1-9	ALWAYS
	Image Pixel	Table 8.1-10	ALWAYS
	Cine	Table 8.1-11	Only if US Multiframe
	Multi-Frame	Table 8.1-12	Only if US Multiframe
Image	US Region Calibration	Table 8.1-13	ANAP
	US Image	Table 8.1-14	ALWAYS
	VOI LUT	Table 8.1-15	ALWAYS
	SOP Common	Table 8.1-17	ALWAYS

8.1.1.1.1 Additional Module

Table 8.1-2
ADDITIONAL MODULES

Module	Reference	Presence of Module
Image Plane	Table 8.1-16	ANAP

8.1.1.2 Comprehensive Structured Report IOD

Table 8.1-3

IOD OF CREATED COMPREHENSIVE STRUCTURED REPORT SOP INSTANCES

IE	Module	Reference	Presence of Module
Patient	Patient	Table 8.1-4	ALWAYS
Study	General Study	Table 8.1-5	ALWAYS
Sludy	Patient Study	Table 8.1-6	ALWAYS
Series	SR Document Series	Table 8.1-18	ALWAYS
Equipment	General Equipment	Table 8.1-8	ALWAYS
	SR Document General	Table 8.1-19	ALWAYS
Document	SR Document Content	Table 8.1-20	ALWAYS
	SOP Common	Table 8.1-21	ALWAYS

8.1.1.3 Common Modules

PATIENT MODULE OF CREATED SOP INSTANCES Attribute Presence VR Source Tag Value of Value Name From MWL or User Input. Values supplied via Modality Worklist will be entered as received. Values MWL/U Patient's Name 0010,0010 ΡN supplied via user input will contain VNAP SER first 3 components (Last^First^Middle). Maximum 64 characters. MWL/U From MWL, user input or Patient ID LO SER/A 0010,0020 generated by device. Maximum 64 ALWAYS characters. UTO Patient's Birth MWL/U VNAP 0010,0030 DA From MWL or user input Date SER MWL/U Patient's Sex CS From MWL or user input VNAP 0010,0040 SER

Table 8.1-4 ATIENT MODULE OF CREATED SOP INSTANCE

Table 8.1-5

GENERAL STUDY MODULE OF CREATED SOP INSTANCES

Attribute Name	Тад	VR	Value	Presence of Value	Source
Study Instance UID	0020,000D	UI	From MWL or generated by device	ALWAYS	MWL/A UTO
Study Date	0008,0020	DA	<yyyymmdd></yyyymmdd>	ALWAYS	AUTO
Study Time	0008,0030	ТМ	<hhmmss></hhmmss>	ALWAYS	AUTO
Referring Physician's Name	0008,0090	PN	From MWL or user input	VNAP	MWL/U SER
Study ID	0020,0010	SH	From Requested Procedure UID or System generate : Study Date + Study Time <yyyymmddhhmmss></yyyymmddhhmmss>	ALWAYS	AUTO

Accession	0008,0050	SH	From MWL or user input	VNAP	MWL/U
Number					SER
			From MWL (Scheduled procedure		
Study	0009 1020	LO	step description, Requested	ANAP	MWL/U
Description	0008,1030		procedure description) or user	ANAP	SER
			input		
Referenced					
Study	0008,1110	SQ	From MWL	ANAP	MWL
Sequence					
> Referenced	0008 1150	UI	From MWL	ANAP	MWL
SOP Class UID	0008,1150	01		ANAP	
> Referenced					
SOP Instance	0008,1155	UI	From MWL	ANAP	MWL
UID					
Procedure Code	0008 1022	SQ	From MWL	ANAP	MWL
Sequence	0008,1032	34			

Table 8.1-6

PATIENT STUDY MODULE OF CREATED SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Patient's Size	0010,1020	DS	From MWL or user input	ANAP	MWL/U SER
Patient's Weight	0010,1030	DS	From MWL or user input	ANAP	MWL/U SER

Table 8.1-7

GENERAL SERIES MODULE OF CREATED SOP INSTANCES

Attribute Name	Тад	VR	Value	Presence	Source
				of Value	
Modality	0008,0060	CS	US	ALWAYS	AUTO
Series Instance	0020,000E	UI	Generated by device	ALWAYS	AUTO
UID					
Series Number	0020,0011	IS	Generated by device, increments	ALWAYS	AUTO

			from "1" in each study		
Series Date	0008,0021	DA	<yyyymmdd></yyyymmdd>	ALWAYS	AUTO
Series Time	0008,0031	ТМ	<hhmmss></hhmmss>	ALWAYS	AUTO
Performing Physician's Name	0008,1050	PN	From MWL or user input	ANAP	MWL/US ER
Operators' Name	0008,1070	PN	From user input	ANAP	USER
Referenced Performed Procedure Step Sequence	0008,1111	SQ	Identifies the MPPS SOP Instance to which this image is related	ALWAYS	MPPS
> Referenced SOP Class UID	0008,1150	UI	MPPS SOP Class UID "1.2.840.10008.3.1.2.3.3"	ALWAYS	MPPS
> Referenced SOP Instance UID	0008,1155	UI	MPPS SOP Instance UID	ALWAYS	MPPS
Request Attributes Sequence	0040,0275	SQ	Zero or 1 item will be present	ANAP	AUTO
> Requested Procedure ID	0040,1001	SH	From MWL	ANAP	MWL
 > Scheduled Procedure Step ID 	0040,0009	SH	From MWL	ANAP	MWL
 Scheduled Procedure Step Description 	0040,0007	LO	From MWL	ANAP	MWL
 > Scheduled Protocol Code Sequence 	0040.0008	SQ	From MWL	ANAP	MWL
Performed Procedure Step ID	0040,0253	SH	Same as MPPS	ALWAYS	MPPS
Performed	0040,0244	DA	Same as Study Date	ALWAYS	AUTO

Procedure Step					
Start Date					
Performed					
Procedure Step	0040,0245	ТМ	Same as Study Time	ALWAYS	AUTO
Start Time					
Performed					
Procedure Step	0040,0254	LO	Same as Study Description	ANAP	MWL/US ER
Description					ER

GENERAL EQUIPMENT MODULE OF CREATED SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Manufacturer	0008,0070	LO	SAMSUNG MEDISON CO., LTD.	ALWAYS	AUTO
Institution Name	0008,0080	LO	From user input	ANAP	CONFIG
Station Name	0008,1010	SH	From user input	ANAP	CONFIG
Manufacturer's Model Name	0008,1090	LO	HS50	ALWAYS	AUTO
Device Serial Number	0018,1000	LO	Generated by device	ALWAYS	AUTO
Software Versions	0018,1020	LO	Generated by device	ALWAYS	AUTO

8.1.1.4 US or US Multiframe Image Module

Table 8.1-9

GENERAL IMAGE MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source	
Instance	0020 0012	IS	Generated by device, increments	ALWAYS		
Number	0020,0013	from "1" in each series	ALVVAYS	AUTO		
Patient	0020,0020	0020 0020	<u></u>	NULL		
Orientation		CS	NOLL			
Content Date	0008,0023	DA	<yyyymmdd></yyyymmdd>	ALWAYS	AUTO	
Content Time	0008,0033	ТМ	<hhmmss></hhmmss>	ALWAYS	AUTO	
Image Type	0008,0008	CS	"ORIGINAL" and "PRIMARY"	ALWAYS	AUTO	

Acquisition Date	0008,0022	DA	<yyyymmdd></yyyymmdd>	ALWAYS	AUTO
Acquisition Time	0008,0032	тм	<hhmmss></hhmmss>	ALWAYS	AUTO
Acquisition DateTime	0008,002A	DT	<yyyymmddhhmmss></yyyymmddhhmmss>	ALWAYS	AUTO
Ultrasound Color Data Present	0028,0014	US	Color data not present = "00" Color data is present = "01"	ALWAYS	AUTO
Lossy Image Compression	0028,2110	CS	US = "00" (uncompressed) or "01" (lossy compressed) US-MF = "01" (lossy compressed)	ALWAYS	AUTO
Lossy Image Compression Ratio	0028,2112	DS	Used if (0028, 2110) = "01", Calculated by device	ANAP	AUTO
Lossy Image Compression Method	0028,2114	CS	"ISO_10918_1", used if (0028,2110) = "01"	ANAP	AUTO

IMAGE PIXEL MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Тад	VR Value	Presence	Source	
Attribute Name	Tay	۷N	Value	of Value	Source
Samples per	0028,0002	US	"3" for RGB or YBR_FULL_422	ALWAYS	AUTO
Pixel	0028,0002	03	"1" for MONOCHROME2	ALWATS	AUTO
Photometric			Uncompressed = "RGB" or		
	0028,0004	CS	"MONOCHROME2"	ALWAYS	AUTO
Interpretation			Compressed = "YBR_FULL_422"		
Rows	0028,0010	US	US = "924", US-MF = CONFIG	ALWAYS	AUTO
ROWS		05	(Default 924)		
Columna	0029 0011	US	US = "1232", US-MF = CONFIG	ALWAYS	
Columns	0028,0011	05	(Default 1232)		AUTO
Bits Allocated	0028,0100	US	"8"	ALWAYS	AUTO
Bits Stored	0028,0101	US	"8"	ALWAYS	AUTO
High Bit	0028,0102	US	"7"	ALWAYS	AUTO
Pixel	0028,0103	US	"0"	ALWAYS	AUTO

Representation					
		OW			
Pixel Data	7FE0,0010	or	Generated by device	ALWAYS	AUTO
		OB			
Planar	0028 0006	US	"0"	ALWAYS	AUTO
Configuration	0028,0006		0	ALWAIS	AUTO
Private Creator	7FE1,0010	LO	"MEDISON_US"	ANAP	AUTO
3D Volume	7FE1,1002	OB	3D Volume Data	ANAP	AUTO

CINE MODULE OF CREATED US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Frame Time	0018,1063	DS	Milliseconds	ANAP	AUTO
Cine Rate	0018,0040	IS	Frames per second	ANAP	AUTO

Table 8.1-12

MULTI-FRAME MODULE OF CREATED US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Number of	0028,0008	IS	Numbers of Frames	ANAP	AUTO
Frames	0028,0008			,	AUTO
Frame					
Increment	0028,0009	AT	"1577059" : (0018, 1063)	ANAP	AUTO
Pointer					

Table 8.1-13

US REGION CALIBRATION MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Sequence of Ultrasound Regions	0018,6011	SQ	Generated by device. A sequence is present for each region in the system display.	ANAP	AUTO
> Region	0018,6018	UL	Left position of region	ALWAYS	AUTO

Location Min x0					
> Region Location Min y0	0018,601A	UL	Top position of region	ALWAYS	AUTO
> Region Location Max x1	0018,601C	UL	Right position of region	ALWAYS	AUTO
> Region Location Max y1	0018,601E	UL	Bottom position of region	ALWAYS	AUTO
> Physical Units X Direction	0018,6024	US	2D Image : 0003H = cm M-Mode : 0004H = seconds Doppler : 0004H = seconds	ALWAYS	AUTO
> Physical Units Y Direction	0018,6026	US	2D Image : 0003H = cm M-Mode : 0003H = cm Doppler : 0005H = hertz or 0007H = cm/sec	ALWAYS	AUTO
> Physical Delta X	0018,602C	FD	The physical value per pixel increment	ALWAYS	AUTO
> Physical Delta Y	0018,602E	FD	The physical value per pixel increment	ALWAYS	AUTO
> Region Spatial Format	0018,6012	US	2D Tissue : 0001H M-Mode Tissue or flow : 0002H Spectral (CW or PW Doppler) : 0003H	ALWAYS	AUTO
> Region Data Type	0018,6014	US	Tissue : 0001H Color Flow : 0002H PW Spectral Doppler : 0003H CW Spectral Doppler : 0004H	ALWAYS	AUTO
> Region Flags	0018,6016	UL	See DICOM PS 3.3 C.8.5.5.1.3	ALWAYS	AUTO

US IMAGE MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Тад	VR	Value	Presence	Source
	iug	VIX	Value	of Value	oouroc

F

Samples Per Pixel	0028,0002	US	"3" for RGB or YBR_FULL_422 "1" for MONOCHROME2	ALWAYS	AUTO
Photometric Interpretation	0028,0004	CS	Uncompressed = "RGB" or "MONOCHROME2" Compressed = "YBR_FULL_422"	ALWAYS	AUTO
Bits Allocated	0028,0100	US	"8"	ALWAYS	AUTO
Bits Stored	0028,0101	US	"8"	ALWAYS	AUTO
High Bit	0028,0102	US	"7"	ALWAYS	AUTO
Planar Configuration	0028,0006	US	"0"	ALWAYS	AUTO
Pixel Representation	0028,0103	US	"0"	ALWAYS	AUTO
Image Type	0008,0008	CS	"ORIGINAL" and "PRIMARY"	ALWAYS	AUTO
Lossy Image Compression	0028,2110	CS	US = "00" (uncompressed) or "01" (lossy compressed) US-MF = "01" (lossy compressed)	ALWAYS	AUTO

VOI LUT MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Window Center	0028,1050	DS	default : "128"	ALWAYS	CONFIG
Window Width	0028,1051	DS	default : "256"	ALWAYS	CONFIG

Table 8.1-16

IMAGE PLANE MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source	
Pixel Spacing	0028,0030	DS	 In case that All following conditions are satisfied, This attribute is inserted. 1. User shall select the option activating Pixel Spacing at the DICOM Setup. 2. Image shall have regions consisting 	ANAP	AUTO	

of only tissue and color
3. For all regions, Units for X and Y
direction shall be "cm"
4. For all regions, Delta X of US
Region calibration module shall have
the same value.
5. For all regions, Delta Y of US
Region calibration module shall have
the same value.

Table 8.1-17

SOP COMMON MODULE OF CREATED US OR US MULTIFRAME SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
SOP Class UID	0008,0016	UI	US = "1.2.840.10008.5.1.4.1.1.6.1" US-MF = "1.2.840.10008.5.1.4.1.1.3.1"	ALWAYS	AUTO
SOP Instance UID	0008,0018	UI	Generated by device	ALWAYS	AUTO
Specific Character Set	0008,0005	CS	Ref. Section 6 SUPPORT OF CHARACTER SETS	ALWAYS	AUTO

8.1.1.5 Comprehensive Structured Report Modules

Table 8.1-18

SR DOCUMENT SERIES MODULE OF CREATED COMPREHENSIVE SR SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Modality	0008,0060	CS	SR	ALWAYS	AUTO
Series Instance UID	0020,000E	UI	Generated by device	ALWAYS	AUTO
Series Number	0020,0011	IS	"2"	ALWAYS	AUTO

Referenced Performed			Identifies the MPPS SOP Instance		
Procedure Step Sequence	0008,1111	SQ	to which this image is related	ALWAYS	MPPS
 Referenced SOP Class UID 	0008,1150	UI	MPPS SOP Class UID "1.2.840.10008.3.1.2.3.3"	ALWAYS	MPPS
 Referenced SOP Instance UID 	0008,1155	UI	MPPS SOP Instance UID	ALWAYS	MPPS

SR DOCUMENT GENERAL MODULE OF CREATED COMPREHENSIVE SR SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
Instance Number	0020,0013	IS	Generated by device, increments from "1" in each	ALWAYS	AUTO
			series		
Completion Flag	0040,A491	CS	"PARTIAL"	ALWAYS	AUTO
Verification Flag	0040,A493	CS	"UNVERIFIED"	ALWAYS	AUTO
Content Date	0008,0023	DA	<yyyymmdd></yyyymmdd>	ALWAYS	AUTO
Content Time	0008,0033	ТМ	<hhmmss></hhmmss>	ALWAYS	AUTO
Referenced Request Sequence	0040,A370	SQ	1 item will be present	ANAP	AUTO
> Study Instance UID	0020,000D	UI	From MWL or generated by device	ANAP	MWL/AUTO
> Referenced Study Sequence	0008,1110	SQ	From MWL	ANAP	MWL
>> Referenced SOP Class UID	0008,1150	UI	From MWL	ANAP	MWL
>> Referenced SOP Instance UID	0008,1155	UI	From MWL	ANAP	MWL
> Accession Number	0008,0050	SH	From MWL or user input	VNAP	MWL/USER

> Placer Order					
Number/Imaging	0040,2016	LO	NULL	VNAP	AUTO
Service Request					
> Filler Order					
Number/Imaging	0040,2017	LO	NULL	VNAP	AUTO
Service Request					
> Requested	0040,1001	SH	From MWL	VNAP	MWL
Procedure ID	0040,1001	511		VINAE	
> Requested					
Procedure	0032,1060	LO	From MWL	VNAP	MWL
Description					
> Requested					
Procedure Code	0032,1064	SQ	From MWL	VNAP	MWL
Sequence					
Performed					
Procedure Code	0040,A372	SQ	NULL	VNAP	AUTO
Sequence					

SR DOCUMENT CONTENT MODULE OF CREATED COMPREHENSIVE SR SOP INSTANCES

Attribute Name	Тад	VR	Value	Presence of Value	Source
Value Type	0040,A040	CS	"CONTAINER"	ALWAYS	AUTO
Concept Name Code Sequence	0040,A043	SQ	1 item will be present	ALWAYS	AUTO
> Include 'Code Sequence Macro'			"EV(125000, DCM, "OB-GYN Ultrasound Procedure Report") for OB-GYN	ALWAYS	AUTO
Include 'Container	Macro'			ALWAYS	AUTO
Content Sequence	0040,A730	SQ	One or more items may be included in this sequence	ALWAYS	AUTO
> Relationship Type	0040,A010	CS	Ref. Section 9 STRUCTURED REPORT TEMPLATES	ALWAYS	AUTO
> Include Docume	nt		Ref. Section 9 STRUCTURED	ALWAYS	AUTO

Relationship Macro	REPORT TEMPLATES		
> Include Document Content	Ref. Section 9 STRUCTURED	ALWAYS AUTO	
Macro	REPORT TEMPLATES	ALWA13	AUTO

SOP COMMON MODULE OF CREATED COMPREHENSIVE SR SOP INSTANCES

Attribute Name	Tag	VR	Value	Presence of Value	Source
SOP Class	0008,0016	UI	"1.2.840.10008.5.1.4.1.1.88.33"	ALWAYS	AUTO
UID	0008,0010	01	1.2.040.10000.3.1.4.1.1.00.33	ALWA15	AUTO
SOP Instance	0008,0018	UI	Generated by device	ALWAYS	AUTO
UID	0008,0018 01		Generated by device	ALWA15	AUTO
Specific	0008,0005	CS	Ref. Section 6 SUPPORT OF	ALWAYS	AUTO
Character Set	0008,0005	03	CHARACTER SETS	ALWATS	AUTO

8.1.2 Used Fields in received IOD by application

The HS50 storage application does not receive SOP Instances. The usage of attributes received via Modality Worklist is described in section 4.2.2.3.1.3.

8.1.3 Attribute mapping

The relationships between attributes received via Modality Worklist, stored in acquired images and communicated via MPPS are summarized in the Table below. The format and conversions used in Table are the same as the corresponding table in IHE Technical Framework, Rev. 7.0 May 15, 2006, vol. II, Appendix A.

ATTRIBUTE MAPPING BETWEEN MODALITY WORKLIST, IMAGE AND MPPS						
Modality Worklist	Image IOD	MPPS IOD				
Patient's Name	Patient's Name	Patient's Name				
Patient ID	Patient ID	Patient ID				
Patient's Birth Date	Patient's Birth Date	Patient's Birth Date				
Patient's Sex	Patient's Sex	Patient's Sex				

Table 8.1-22

HS50 DICOM Conformance Statement

Patient's Size	Patient's Size	
Patient's Weight	Patient's Weight	
Referring Physician's Name	Referring Physician's Name	
Scheduled Performing Physician's	De ferrier Die sisie de Nieure	
Name	Performing Physician's Name	Performing Physician's Name
		Scheduled Step Attributes Sequence
Study Instance UID	Study Instance UID	> Study Instance UID
Referenced Study Sequence	Referenced Study Sequence	> Referenced Study Sequence
Accession Number	Accession Number	> Accession Number
	Request Attributes Sequence	
Requested Procedure ID	> Requested Procedure ID	> Requested Procedure ID
Requested Procedure Description		> Requested Procedure Description
Scheduled Procedure Step ID	> Scheduled Procedure Step ID	> Scheduled Procedure Step ID
Scheduled Procedure Step	> Scheduled Procedure Step	- Schodulad Dracadura Stan Deparintion
Description	Description	> Scheduled Procedure Step Description
Scheduled Protocol Code	> Scheduled Protocol Code	- Schodulad Protocol Codo Seguence
Sequence	Sequence	> Scheduled Protocol Code Sequence
Requested Procedure ID	Study ID	Study ID
	Performed Procedure Step ID	Performed Procedure Step ID
	Performed Procedure Step Start	
	Date	Performed Procedure Step Start Date
	Performed Procedure Step Start	
	Time	Performed Procedure Step Start Time
	Performed Procedure Step	
	Description	Performed Procedure Step Description
		Performed Series Sequence
Requested Procedure Code	Dragoduro Codo Comunica	Dressdurg Code Coguran
Sequence	Procedure Code Sequence	Procedure Code Sequence
	Referenced Performed Procedure	
	Step Sequence	
	> Referenced SOP Class UID	SOP Class UID
	> Referenced SOP Instance UID	SOP Instance UID

8.1.4 Coerced/Modified Fields

The Modality Worklist AE will truncate attribute values received in the response to a Modality Worklist Query if the value length is longer than the maximum length permitted by the attribute's VR.

8.2 DATA DICTIONARY OF PRIVATE ATTRIBUTES

The Private Attributes added to create SOP Instances are listed in the Table below. HS50 reserves blocks of private attributes in groups 7FE1. Further details on usage of these private attributes are contained in Section 8.1

Table 8.2-1 DATA DICTIONALY OF PRIVATE ATTRIBUTES

Тад	Attribute Name	VR	VM
(7FE1, 0010)	Private Creator	LO	1
(7FE1, 1002)	3D Volume	OB	1

8.3 CODED TERMINOLOGY AND TEMPLATES

The Workflow AE is capable of supporting arbitrary coding schemes for Procedure and Protocol Codes. The contents of Requested Procedure Code Sequence (0032, 1064) and Scheduled Protocol Code Sequence (0040, 0008) supplied in Worklist Items will be mapped to Image IOD and MPPS attributes as described in Section 8.1.3

8.4 STANDARD EXTENDED / SPECIALIZED / PRIVATE SOP CLASSES

No Specialized or Private SOP Classes are supported.

8.4.1 US OR US MULTIFRAME IMAGE STORAGE SOP CLASS

The US or US Multiframe Image Storage SOP Classes are extended to create a Standard Extended SOP Class by addition of standard and private attributes to the created SOP Instances as documented in section 8.1

3D Volume Data is transferred to the configured Storage Server, if "Send 3D Volume" option is enabled in the Setup Dialog.

8.5 PRIVATE TRANSFER SYNTAXES

No Private Transfer Syntaxes are supported.

9 STRUCTURED REPORT TEMPLATES

This Section uses the following forms for describing Structured Report Templates used in HS50.

	Rel with Parent	VT	Concept Name	Presence of Value	Comments
1					
2					

	NL	REL	VT	Concept Name	Unit / CODE Value	Ref TID	Ref CID	Comments or Label
A-1								
A-2								

Rel with Parent	Relationship
VT	Value Type
Concept Name	Any constraints on Concept Name are specified in this filed as defined or enumerated
	coded entries, or as baseline or defined context groups.
Presence of Value	Ref. Section 8.1.1
Comments	Description about Reference section or used values.
Label	Name which is indicated in the system
NL	The nesting level of Content Items is denoted by ">" symbols
REL	Relationship
Unit/Code, Value	Applied unit, enumerated coded entries, or the reference of Context Group.
Ref TID	Referenced Template ID Number
Ref CID	Referenced Context ID Number. The left side of "/" shows a CID value applied in
	"Concept Name" column and the right side shows a CID value applied in "Unit/Code,
	Value" column. (e.g. 228/12012)

9.1 OB-GYN STRUCTURED REPORT TEMPLATE

9.1.1 OB-GYN Ultrasound Report Templates(TID 5000)

Table 9.1-1

OB-GYN ULTRASOUND PROCEDURE REPORT TEMPLATE

	Del with Devent	VT	Concernt Norma	Presence of	Commente	
	Rel with Parent	VT	Concept Name	Value	Comments	
1		CONTAINER	EV (125000, DCM, "OB-GYN Ultrasound	ALWAYS		
I		CONTAINER	Procedure Report")	ALWATS		
2	HAS CONCEPT	INCLUDE	DTID (1204) Language of Content Item			
2	MOD	INCLUDE	and Descendants			
3	HAS OBS	INCLUDE	DTID (1001) Observation Context	ANAP	Ref. Section 9.1.1.1	
	CONTEXT					
4	CONTAINS	INCLUDE	DTID (5001) Patient Characteristics	ANAP	Ref. Section 9.1.1.2	
5	CONTAINS	CONTAINER	DT (111028, DCM, "Image Library")			
6	CONTAINS	IMAGE	No Purpose of reference			
7	CONTAINS	INCLUDE	DTID (5002) OB-GYN Procedure	ANAP	Ref. Section 9.1.1.3	
'	CONTAINO	INCLODE	Summary Section			
8	CONTAINS	INCLUDE	DTID (5004) Fetal Biometry Ratio Section	ANAP	Ref. Section 9.1.1.4	
9	CONTAINS	INCLUDE	DTID (5005) Fetal Biometry Section	ANAP	Ref. Section 9.1.1.5	
10	CONTAINS	INCLUDE	DTID (5006) Long Bones Section	ANAP	Ref. Section 9.1.1.6	
11	CONTAINS	INCLUDE	DTID (5007) Fetal Cranium Section	ANAP	Ref. Section 9.1.1.7	
12	CONTAINS	INCLUDE	DTID (5011) Early Gestation Section	ANAP	Ref. Section 9.1.1.8	
					Ref. Section 오류!	
13	CONTAINS	INCLUDE	DTID (5009) Fetal Biophysical Profile Section	ANAP	참조 원본을 찾을 수	
					없습니다.	
					Ref. Section 오류!	
14	CONTAINS	INCLUDE	DTID (5010) Amniotic Sac Section	ANAP	참조 원본을 찾을 수	
					없습니다.	
					Ref. Section 오류!	
15	CONTAINS	INCLUDE	DTID (5015) Pelvis and Uterus Section	ANAP	참조 원본을 찾을 수	
					없습니다.	
					Ref. Section 오류!	
16	CONTAINS	INCLUDE	DTID (5010) Ovary Section	ANAP	참조 원본을 찾을 수	
					없습니다.	

17	CONTAINS	INCLUDE	DTID (5010) Left Ovarian Follicles Section	ANAP	Ref.Section 오류! 참조 원본을 찾을 수 없습니다.
18	CONTAINS	INCLUDE	DTID (5010) Right Ovarian Follicles Section	ANAP	Ref. Section 오류! 참조 원본을 찾을 수 없습니다.
19	CONTAINS	INCLUDE	DTID (5010) Embryonic Vascular Structure - General Report Format	ANAP	Ref. Section 오류! 참조 원본을 찾을 수 없습니다.
20	CONTAINS	INCLUDE	DTID (5010) Pelvic Vasculature Anatomical Location - General Report Format	ANAP	Ref. Section 오류! 참조 원본을 찾을 수 없습니다.
21	CONTAINS	INCLUDE	Fetal Doppler - ViewPoint Format	ANAP	Ref. Section 오류! 참조 원본을 찾을 수 없습니다.
22	CONTAINS	INCLUDE	Maternal Doppler Measurements - ViewPoint Format	ANAP	Ref.Section 오류! 참조 원본을 찾을 수 없습니다.

9.1.1.1 Observation ConText (TID 1001)

Table 9.1-2

OBSERVATION CONTEXT IN OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label
A-1	HAS OBS CONTEXT	CODE	(121005, DCM, "Observer	(121006, DCM,	
A-1	TAS OBS CONTEXT	CODE	Туре")	"Person")	
A-2	HAS OBS CONTEXT	PNAME	(121008, DCM, "Person		Rof Dhysisian
A-2	HAS OBS CONTEXT	FNAME	Observer Name")		Ref. Physician
A-3	HAS OBS CONTEXT	CODE	(121024, DCM, "Subject Class")	(121025 ,DCM,"Patient")	
A-4	HAS OBS CONTEXT	PNAME	(121029,DCM, "Subject Name")		Last Name, First
7-4	TAS OBS CONTEXT				Name
A-5	HAS OBS CONTEXT	DATE	(121031,DCM, "Subject Birth		BirthDate
A-3	TAS OBS CONTEXT	DATE	Date")		BirtinDate
				(M, DCM, "Male")	Gender
A-6	HAS OBS CONTEXT	CODE	(121032,DCM, "Subject Sex")	(F, DCM, "Female")	
				(U, DCM, "Unknown	

				sex")	
A-7	HAS OBS CONTEXT	NUM	(121033,DCM, "Subject Age")	(mo, UCUM, "month")	Not Used

9.1.1.2 Patient Characteristics (TID 5001)

Table 9.1-3PATIENT CHARACTERISTICS IN OB-GYN SR

	REL	νт	Concept Name	Unit / CODE Value	Label				
A-8	CONTAINS	CONTAINTER	(121118,DCM "Patient						
A-0	CONTAINS	CONTAINTER	Characteristics")						
A-8-1	CONTAINS	TEXT	(121106,DCM, "Comment")		Description				
				(cm, UCUM,					
A-8-2	CONTAINS	S NUM	(8302-2, LN, "Patient Height")	"centimeter")	Height				
				(mm, UCUM, "millimeter")					
A-8-3	CONTAINS	NUM	(29463-7, LN, "Patient Weight")	(kg, UCUM, "kilograms")	Weight				
A-8-4	CONTAINS	NUM	(11996-6, LN "Gravida")	(1, UCUM, "no units")	Gravida				
A-8-5	CONTAINS	NUM	(11977-6, LN, "Para")	(1, UCUM, "no units")	Para				
A-8-6	CONTAINS	NUM	(11612-9, LN, "Aborta")	(1, UCUM, "no units")	Aborta				
A 0 7	CONTAINC		(33065-4, LN, "Ectopic	(4, 110) INA "no unito")	Fatania				
A-8-7	CONTAINS	S NUM	Pregnancies")	(1, UCUM, "no units")	Ectopic				

9.1.1.3 OB-GYN Summary Section (TID 5002)

Table 9.1-4

OB-GYN Procedure Summary Section

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-10	CONTAINS	CONTAINER	(121111, DCM, "Summary")			
A-10-1	CONTAINS	DATE	(11778-8, LN, "EDD")		EDD	

A-10-2			(11779-6, LN, "EDD from LMP")		EDD(LMP)	
A-10-3			(11781-2, LN, "EDD from average ultrasound age")		EDD(AUA)	
A-10-4			(11955-2, LN, "LMP")		LMP	
A-10-5			(11976-8, LN, "Ovulation date")		Exp.Ovul.	
A-10-6	CONTAINS	NUM	(11878-6, LN, "Number of Fetuses")	(1, UCUM, "no units")		
A-10-7	CONTAINS	TEXT	(12186, DCM, "Comment")		Comment	
A-10-8	CONTAINS	CONTAINER	(125008, DCM, "Fetus Summary")			
A-10-8-1	HAS OBS CONTEXT	ТЕХТ	(11951-1, LN, "Fetus ID")			Will be present if more than one fetus.
A-10-8-2	CONTAINS	NUM	(11878-6, LN, "Number of Fetuses")		Gestations	
A-10-8-3	CONTAINS	NUM	(18185-9, LN, "Gestational Age")		GA(AUA)	
A-10-8-4	CONTAINS	NUM	(11885-1, LN, "Gestational Age by LMP")		GA(LMP)	
A-10-8-5	CONTAINS	NUM	(11727-5, LN, "Estimated Weight")	(kg, UCUM, "kg")	EFW	

A-10-8-5-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(Context ID 12014)OB Fetal Body Weight Equations and Tables		Ref. Table 9.1-37
A-10-8-6	CONTAINS	NUM	(11767-1, LN, "EFW percentile rank")	(%, UCUM, "Percent")	Pctl.(EFW)	
A-10-8-6-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(Context ID 12016)Estim ated Fetal Weight Percentile Equations and Tables		Ref.Table 9.1-39
A-10-8-7	CONTAINS	NUM	(11948-7, LN, "Fetal Heart Rate")	(bpm, UCUM "bpm")	FHR	

9.1.1.4 OB-GYN Fetal Biometry Ratio Section (TID 5004)

Table 9.1-5

Fetal Biometry Ratio Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Comments
A-11	CONTAINS	CONTAINER	(125001, DCM, "Fetal Biometry Ratios")		
A-11-1	HAS OBS CONTEXT	ТЕХТ	(11951-1, LN, "Fetus ID")		Will be present if more than one fetus.
A-11-2	CONTAINS	NUM	(12004, CID, "Fetal Biometry Ratios")	(1, UCUM, "no units")	

9.1.1.5 OB-GYN Fetal Biometry Section (TID 5005)

Table 9.1-6

Fetal Biometry Section in OB-GYN SR

	REL	νт	Concept Name	Unit / CODE Value	Comments
A-12	CONTAINS	CONTAINER	(125002, DCM, "Fetal Biometry")		
A-12-1	HAS OBS CONTEXT	ТЕХТ	(11951-1, LN, "Fetus ID")		Will be present if more than one fetus.
A-12-2	CONTAINS	CONTAINER	(125005, DCM, "Biometry Group")		
A-12-2-1	CONTAINS	NUM	Context ID 12005 Extended Fetal Biometry Measurements	(cm, UCUM, "centimeter") (mm, UCUM, "millimeter") (cm2, UCUM, "Square centimeter")	Ref. Table 9.1-19
A-12-2-1-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-12-2-2	CONTAINS	NUM	(18185-9, LN, "Gestational Age")	(d, UCUM, "days")	
A-12-2-2-1	INFERRED FROM	CODE	(121420 , DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12013)Gestational Age Equations and Tables	Ref. Table 9.1-36

A-12-2-3	CONTAINS	NUM	(125012, DCM, "Growth Percentile Rank") (125013, DCM, "Growth Z-score")	(1, UCUM, "no units") (%, UCUM, "Percent")	
A-12-2-3-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12015) Fetal Growth Equations and Tables	Ref. Table 9.1-38

9.1.1.6 OB-GYN Fetal Long Bones Section (TID 5006)

Table 9.1-7

Long Bones	Sections	in	OB-GYN SR
Long Bonoo	000010110		

	REL	νт	Concept Name	Unit / CODE Value	Comments
A-13	CONTAINS	CONTAINER	(125003, DCM, "Fetal Long Bones")		
A-13-1	HAS OBS CONTEXT	TEXT	(11951-1, LN,"FetusID")		Will be present if more than one fetus.
A-13-2	CONTAINS	CONTAINER	(125005, DCM, "Biometry Group")		
A-13-2-1-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-13-2-1	CONTAINS	NUM	Context ID 12006 Extended Fetal Long Bones Biometry Measurements	(cm, UCUM, "centimeter")	Ref. Table 9.1-20

A-13-2-1-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-13-2-2	CONTAINS	NUM	(18185-9, LN, "Gestational Age")	(d, UCUM, "day")	
A-13-2-2-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12013)Gestational Age Equations and Tables	Ref. Table 9.1-36
A-13-2-3	CONTAINS	NUM	(125012, DCM, "Growth Percentile Rank")	(1, UCUM, "no units") (%, UCUM, "Percent")	
A-13-2-3-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12015)Fetal Growth Equations and Tables	Ref. Table 9.1-38

9.1.1.7 OB-GYN Fetal Cranium Section (TID 5007)

Table 9.1-8

Fetal Cranium Sections in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Comments
A-14	CONTAINS	CONTAINER	(125004, DCM, "Fetal Cranium")		
A-14-1	HAS OBS CONTEXT	TEXT	(11951-1, LN, "FetusID")		Will be present if more than one fetus.

A-14-2	CONTAINS	CONTAINER	(125005, DCM, "Biometry Group")		
A-14-2-1	CONTAINS	NUM	Context ID 12007 Extended Fetal Cranium	(cm, UCUM, "centimeter") (cm2, UCUM, "Square centimeter")	Ref. Table 9.1-32
A-14-2-1-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-14-2-2	CONTAINS	NUM	(18185-9, LN, "Gestational Age")	(d, UCUM, "day")	
A-14-2-2-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12013)Gestational Age Equations and Tables	Ref. Table 9.1-36
	CONTAINS	NUM	(125012, DCM, "Growth Percentile Rank")	(1, UCUM, "no units") (%, UCUM, "Percent")	
A-14-2-3	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12015)Fetal Growth Equations and Tables	Ref. Table 9.1-38

9.1.1.8 OB-GYN Early Gestation Section (TID 5011)

Table 9.1-9

Early Gestation Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-15	CONTAINS	CONTAINER	(125009, DCM, "Early Gestation")			

A-15-1	HAS OBS CONTEXT	TEXT	(11951-1, LN, "Fetus ID")		Will be present if more than one fetus.
A-15-2	CONTAINS	CONTAINER	(125005, DCM, "Biometry Group")		
A-15-2-1	CONTAINS	NUM	Context ID 12009 Extended Early Gestation Biometry Measurements	(cm, UCUM, "centimeter") (cm2, UCUM, "Square centimeter")	Ref. Table 9.1-23
A-15-2-1-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-15-2-2	CONTAINS	NUM	(18185-9, LN Gestational Age	(d, UCUM, "day")	
A-15-2-2-1	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12013)Gestational Age Equations and Tables	Ref. Table 9.1-36
	CONTAINS	NUM	(125012, DCM, "Growth Percentile Rank")	(1, UCUM, "no units") (%, UCUM, "Percent")	
A-15-2-3	INFERRED FROM	CODE	(121420, DCM, "Equation") (121424, DCM, "Table of Values")	(ContextID 12015)Fetal Growth Equations and Tables	Ref. Table 9.1-38

9.1.1.9 OB-GYN Fetal Biophysical Profile Section (TID 5009)

Table 9.1-10

Fetal Biophysical Profile Section in OB-GYN SR

CONTAINS HAS OBS CONTEXT	CONTAINER	(125006, DCM, "Biophysical Profile") (11951-1, LN, "Fetus ID")			Will be present if
	TEXT				
					more than one fetus.
CONTAINS	NUM	(11631-9, LN, "Gross Body Movement") (11632-7, LN, "Fetal Breathing") (11635-0, LN, "Fetal Tone") (11635-5, LN, "Fetal Heart Reactivity") (11630-1, LN, "Amniotic Fluid Volume") (11634-3, LN,	({0:2}, UCUM, "range 0:2")	Fetal Movements Fetal Breathing Movements Fetal Tone Nonstress Test Amniotic Fluid Volume	
c	ONTAINS	ONTAINS NUM	DNTAINS NUM (11635-0, LN, "Fetal Tone") (11635-5, LN, "Fetal Heart Reactivity") (11630-1, LN, "Amniotic Fluid Volume")	(11635-0, LN, "Fetal ({0:2}, UCUM, "range Tone") 0:2") (11635-5, LN, "Fetal Heart Reactivity") (11630-1, LN, "Amniotic Fluid Volume") (11634-3, LN, "Biophysical Profile (1, UCUM, "no units")	NUM

9.1.1.10 OB-GYN Amniotic Sac Section (TID 5010)

Table 9.1-9

Amniotic Sac Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-17	CONTAINS	CONTAINER	(121070, DCM, "Findings")		AFI	

A-17-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	(T-F1300, SRT, "Amniotic Sac")		
		(11627-7, LN, "Amniotic Fluid Index")	(cm, UCUM, "centimeter")	AFI		
	0.01/74/10/0		Context ID 12008			
A-17-2	CONTAINS	NUM	Extended OB-			Ref. Table
			GYN Amniotic			9.1-22
			Sac			
			(99004-01, MDSN,			
			"MVP")		MVP	

9.1.1.11 OB-GYN Pelvis and Uterus Section (TID 5015)

Table 9.1-10

Pelvis and Uterus Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-18	CONTAINS	CONTAINER	(125011, DCM, "Pelvis and Uterus")		Uterus / Cervix	
A-18-1	CONTAINS	CONTAINER	(T-83000, SRT, "Uterus")		Uterus	
	CONTAINS	NUM	(11865-3, LN, "Uterus Width")	(cm, UCUM, "centimeter")	Width	
A-18-1-1			(11842-2, LN, "Uterus Length")		Length	
			(11859-6, LN, "Uterus Height")		Height	
A-18-1-1- 1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation		

A-18-1-2	CONTAINS	NUM	(33192-6, LN, "Uterus Volume")	(cm3, UCUM, "Cubic centimeter")	Vol.	
A-18-2	CONTAINS	NUM	Context ID 12011 Extended Ultrasound Pelvis and Uterus	(cm, UCUM, "centimeter")	Cervix Length	Ref. Table 9.1-24
A-18-2-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation		
A-18-3	CONTAINS	NUM	Cervix Volume	(cm3, UCUM, " Cubic centimeter ")	Cervix Vol.	

9.1.1.12 OB-GYN Ovary Section (TID 5010)

Table 9.1-13

Ovary in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-19	CONTAINS	CONTAINER	(121070, DCM, "Findings")		Ovary	
A-19-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	(T-87000, SRT, "Ovary")		
A-19-2	CONTAINS	CONTAINER	(T-87000, SRT, "Ovary")		Left Ovary	
			(11829-9, LN, "Left Ovary Width")	(cm, UCUM,	Width	
A-19-2-1	CONTAINS	NUM	(11840-6, LN, "Left Ovary Length")	"centimeter")	Length	

			(11857-0, LN,]	
			"Left Ovary		Height
			Height")		
A-19-2-1- 1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-19-2-2	CONTAINS	NUM	(12164-0, LN, "Left Ovary	(cm3, UCUM, " Cubic centimeter	Vol.
			Volume")	")	
A-19-3	CONTAINS	CONTAINER	(T-87000, SRT, "Ovary")		Right Ovary
	CONTAINS	DNTAINS NUM	(11830-7, LN, "Right Ovary Width")	(cm, UCUM, "centimeter")	Width
A-19-3-1			(11841-4, LN, "Right Ovary Length")		Length
			(11858-8, LN, "Right Ovary Height")		Height
A-19-3-1- 1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	
A-19-3-2	CONTAINS	NUM	(12165-7, LN, "Right Ovary Volume")	(cm3, UCUM, " Cubic centimeter ")	Vol.

9.1.1.13 OB-GYN Left Ovarian Follicles Section (TID 5010)

Table 9.1-11

Left Ovarian Follicle Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A 20	A-20 CONTAINS CONTAINE		(121070, DCM, "Findings")		Left	
A-20	CONTAINS	CONTAINER	(121070, DCIVI, Findings)		Follicles	
A 20.1	HAS	CODE	(G-C0E3, SRT, "Finding	(T-87600, SRT,		
A-20-1	CONCEPT	CODE	Site")	"Ovarian Follicle")		

	MOD					
A-20-2	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	(G-A101, SRT, "Left")		
A-20-3	CONTAINS	NUM	(11879-4, LN, "Number of follicles in left ovary")			
A-20-4	CONTAINS	CONTAINER	(125007, DCM, "Measurement Group")			
A-20-4-1	HAS OBS CONTEXT	ТЕХТ	(12510, DCM, "Identifier")		"1", "2" 	
A-20-4-2	CONTAINS	NUM	(GD705, SRT, "Volume")	(cm3, UCUM, " Cubic centimeter ")	Vol.	
A-20-4-3	CONTAINS	NUM	(11793-7, LN, "Follicle Diameter")	(cm, UCUM, "centimeter")	[1], [2] 	
A-20-4- 3-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	(R-002E1, SRT, "Ovarian Follicle") (R-00317, SRT, "Mean")		

9.1.1.14 OB-GYN Right Ovarian Follicles Section (TID 5010)

Table 9.1-12

Right Ovarian Follicle Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A-19	CONTAINS	CONTAINER			Right	
A-19	CONTAINS	CONTAINER	(121070, DCM, "Findings")		Follicles	
	HAS		(G-C0E3, SRT, "Finding	(T-87600, SRT,		
A-19-1	CONCEPT	CODE				
	MOD		Site")	"Ovarian Follicle")		
	HAS					
A-19-2	CONCEPT	CODE	(G-C171, SRT, "Laterality")	(G-A100, SRT,		
	MOD			"Right")		
A-19-3	CONTAINS	NUM	(11879-4, LN, "Number of			
A-19-3	CONTAINS	NUM	follicles in left ovary")			
A-19-4	CONTAINS C	CONTAINER	(125007, DCM,			
A-19-4			"Measurement Group")			

A-19-4-1	HAS OBS CONTEXT	ТЕХТ	(12510, DCM, "Identifier")		"1", "2" 	
A-19-4-2	CONTAINS	NUM	(GD705, SRT, "Volume")	(cm3, UCUM, " Cubic centimeter ")	Vol.	
A-19-4-3	CONTAINS	NUM	(11793-7, LN, "Follicle Diameter")	(cm, UCUM, "centimeter")	[1], [2] 	
A-19-4- 3-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	(R-002E1, SRT, "Ovarian Follicle") (R-00317, SRT, "Mean")		

9.1.1.15 OB-GYN Embryonic Vascular Structure - General Report Format (TID 5010)

Table 9.1-13

	REL	νт	Concept Name	Unit / CODE Value	Label	Comments
A-22	CONTAINS	CONTAINER	(121070, DCM, "Findings")			
	HAS		(C COE2 SPT "Finding	(T-F6800, SRT,		
A-22-1	CONCEPT	CODE	(G-C0E3, SRT, "Finding	"Embryonic Vascular		
	MOD		Site")	Structure")		
				(T-42000, SRT,		
			"Aorta")			
			(T-D0765, SRT,			
				"Descending Aorta")		
		CONTAINER	(12141, CID, "Fetal	(T-45600, SRT,		
A-22-2			NTAINER Vasculature Anatomical Location")	"Middle Cerebral		
				Artery")		
				(T-48581, SRT,		
				"Pulmonary Vein")		
				(T-44000, SRT,		
				"Pulmonary Artery")		
A-22-2-1	HAS OBS	ТЕХТ	(11951-1, LN, "Fetus ID")			
A-22-2-1	CONTEXT					
A-22-2-2	HAS	CONTAINS	(G-C171 SPT "Laterality")	(G-A103, SRT,		
A-22-2-2	CONCEPT	CONTAINS	(G-C171, SRT, "Laterality")	"Unilateral")		

Embryonic Vascular Structure Section in OB-GYN SR

	MOD				
A-22-2-3	CONTAINS	NUM	(12119, CID, "Vascular Ultrasound Property")		
A-22-2- 3-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	

9.1.1.16 OB-GYN Pelvic Vasculature Anatomical Location - General Report Format (TID 5010)

Table 9.1-14

Pelvic Vasculature Anatomical Location Section in OB-GYN SR

	REL	νт	Concept Name	Unit / CODE Value	Label	Comments
A-23	CONTAINS	CONTAINER	(121070, DCM, "Findings")			
	HAS		(G-C0E3, SRT, "Finding	(T-D6004, SRT,		
A-23-1	CONCEPT	CODE	Site")	"Pelvic Vascular		
	MOD			Structure")		
				(T-F1810, SRT,		
				"Umbilical Artery")		
				(T-F1820, SRT,		
				"Umbilical Vein")		
			(12140, CID, "Pelvic Vasculature Anatomical Location")	(T-46980, SRT,		
				"Ovarian Artery")		
				(T-48780, SRT,		
				"Ovarian Vein")		
A-23-2	CONTAINS	CONTAINER		(T-46820, SRT,		
11202				"Uterine Artery")		
				(T-49010, SRT,		
				"Uterine Vein")		
				(T-F1412, SRT,		
				"Vitelline Artery of		
				Placenta")		
				(T-F1413, SRT,		
				"Vitelline Vein of		
				Placenta")		

				(T-46710, SRT, "Common Iliac Artery")	
A-23-2-2	HAS CONCEPT MOD	CONTAINS	(G-C171, SRT, "Laterality")	(G-A100, SRT, "Right") (G-A101, SRT, "Left") (G-A103, SRT, "Unilateral")	
A-23-2-3	HAS CONCEPT MOD	TEXT	(112050, DCM, "Anatomic Identifier")		
A-23-2-4	CONTAINS	NUM	(12119, CID, "Vascular Ultrasound Property")		
A-23-2- 4-1	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Common CID- Derivation	

9.1.1.17 OB-GYN Fetal Doppler - ViewPoint Format

Table 9.1-15

Fetal Doppler Section in OB-GYN SR

	REL	νт	Concept Name	Unit / CODE Value	Label	Comments
A-22	CONTAINS	CONTAINER	(99000, DCM, "Fetal			
~ 22		00N II AINER	Doppler")			
	HAS					
A-22-1	CONCEPT	TEXT	(11951-1, LN, "Fetus ID")			
	MOD					
A-22-2		(99100, DCM, "Doppler				
A-22-2	CONTAINS	CONTAINER	Group")			
A 00 0 4			(11726-7, LN, "Peak			
A-22-2-1	CONTAINS	NUM	Systolic Velocity")			
				(T-42000, SRT,	OB >	
A-22-2-	HAS	0005	(G-C0E3, SRT, "Finding	"Aorta")	Fetal	
1-1	CONCEPT	CODE	Site")	(T-D0765, SRT,	Aorta	
	MOD			"Descending Aorta")	OB >	

1	I	1	1	1	
				(T-45600, SRT,	MCA
				"Middle Cerebral	OB >
				Artery")	Umblical
				(T-48581, SRT,	Artery
				"Pulmonary Vein")	OB > Lt.
				(T-44000, SRT,	Carotid
				"Pulmonary Artery")	OB > Rt.
				(T-45510, SNM3,	Carotid
				"Cerebral Artery")	OB >
				(T-46420, SNM3,	Ductus
				"Hepatic Artery")	Venosus
				(T-48720, SNM3,	OB > Lt.
				"Hepatic Vein")	Renal
				(T-48710, SNM3,	Artery
				"Inferior Vena Cava")	OB > Rt.
				(T-46600, SNM3,	Renal
				"Renal Artery")	Artery
				(T-46460, SNM3,	Fetal
				"Splenic Artery")	Heart >
				(T-42070, SNM3,	MPA
				"Thoracic Aorta")	Fetal
				(T-F1810, SNM3,	Heart >
				"Umbilical Artery")	Ductus
				(T-48817, SNM3,	Arteriosus
				"Umbilical Vein")	Fetal
				(VP-0001, 99VP,	Heart >
				"Ductus venosus	IVC
				vein")	Fetal
				(T-45010, SNM3,	Heart >
				"Carotid artery")	Desc
				(T-F1412, SNM3,	Aorta
				"Vitelline Artery of	
				Placenta")	
	HAS			(G-A101, SRT,	
A-22-2-	CONCEPT	CODE	(G-C171, SRT, "Laterality")	"Right")	
1-1-1	MOD			(G-A100, SRT,	
L	I	I	1	1	I

				"Left")
				(G-A437, SRT,
				"Maximum")
				(R-404FB, SRT,
				"Minimum")
A-22-2-	HAS	0005	(121401, DCM,	(R-00317, SRT,
1-2	CONCEPT	CODE	"Derivation")	"Mean")
	MOD			(99006-0, GEK,
				"last")
				(R-002E1, SRT,
				"Best value")
A-22-2-2	CONTAINS	NUM	(11653-3, LN, "End	
			Diastolic Velocity")	
A-22-2-	HAS		(G-C0E3, SRT, "Finding	Same A-22-2-1-1
2-1	CONCEPT	CODE	Site")	value
	MOD			
A-22-2-	HAS			Same A-22-2-1-1 -1
2-1-1	CONCEPT	CODE	(G-C171, SRT, "Laterality")	value
	MOD			
A-22-2-	HAS	0005	(121401, DCM,	Same A-22-2-1-2
2-2	CONCEPT	CODE	"Derivation")	value
			(20352-1, LN, "Time	
A-22-2-3	CONTAINS	NUM	averaged mean velocity")	
	HAS			
A-22-2-	CONCEPT	CODE	(G-C0E3, SRT, "Finding	Same A-22-2-1-1
3-1	MOD		Site")	value
	HAS			
A-22-2-	CONCEPT	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1
3-1-1	MOD			value
A 00 0	HAS		(404.404	
A-22-2- 3-2	CONCEPT	CODE	(121401, DCM,	Same A-22-2-1-2
3-2	MOD		"Derivation")	value
A-22-2-4	CONTAINS	NUM	(11692-1, LN, "Time	
<u></u>			averaged peak velocity")	
A-22-2-	HAS	CODE	(G-C0E3, SRT, "Finding	Same A-22-2-1-1

4-1	CONCEPT		Site")	value
	MOD			
A-22-2- 4-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value
A-22-2- 4-2	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Same A-22-2-1-2 value
A-22-2-5	CONTAINS	NUM	(12008-9, LN, "Pulsatility Index")	
A-22-2- 5-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value
A-22-2- 5-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value
A-22-2-6	CONTAINS	NUM	(12023-8, LN, "Resistivity Index")	
A-22-2- 6-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value
A-22-2- 6-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value

9.1.1.18 OB-GYN Maternal Doppler Measurements - ViewPoint Format Table 9.1-16

Maternal Doppler Measurements Section in OB-GYN SR

	REL	VT	Concept Name	Unit / CODE Value	Label	Comments
A 22	CONTAINS		(99001, DCM, "Maternal			
A-23	CONTAINS	CONTAINER	Doppler Measurementsr")			
A 00 4	23-1 CONTAINS	CONTAINER	(99100, DCM, "Doppler			
A-23-1			Group")			
A 00 4 4		NUM	(11726-7, LN, "Peak			
A-23-1-1 CONTAINS	CONTAINS		Systolic Velocity")			

A-23-1- HAS Same A-22-2-1-1 -1
A-23-1- 1-1-1 CONCEPT CODE (G-C171, SRT, "Laterality") Same A-22-2-1-1-1 walue

1-2	CONCEPT MOD		"Derivation")	value	
A-23-1-2	CONTAINS	NUM	(11653-3, LN, "End Diastolic Velocity")		
A-23-1- 2-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value	
A-23-1- 2-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value	
A-23-1- 2-2	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Same A-22-2-1-2 value	
A-23-1-3	CONTAINS	NUM	(20352-1, LN, "Time averaged mean velocity")		
A-23-1- 3-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value	
A-23-1- 3-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value	
A-23-1- 3-2	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Same A-22-2-1-2 value	
A-23-1-4	CONTAINS	NUM	(11692-1, LN, "Time averaged peak velocity")		
A-23-1- 4-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value	
A-23-1- 4-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value	
A-23-1- 4-2	HAS CONCEPT MOD	CODE	(121401, DCM, "Derivation")	Same A-22-2-1-2 value	
A-23-1-5	CONTAINS	NUM	(12008-9, LN, "Pulsatility		

			Index")		
A-23-1- 5-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value	
A-23-1- 5-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value	
A-23-1-6	CONTAINS	NUM	(12023-8, LN, "Resistivity Index")		
A-23-1- 6-1	HAS CONCEPT MOD	CODE	(G-C0E3, SRT, "Finding Site")	Same A-22-2-1-1 value	
A-23-1- 6-1-1	HAS CONCEPT MOD	CODE	(G-C171, SRT, "Laterality")	Same A-22-2-1-1 -1 value	

9.1.2 DCMR Context Groups used in HS50

9.1.2.1 Standard Extended Context Groups in OB-GYN SR

Table 9.1-17

CSD	CV	СМ	Label
LN	11778-8	EDD	Estab.DueDate
LN	11779-6	EDD from LMP	EDD(LMP)
LN	11781-2	EDD from average ultrasound age	EDD(AUA)
LN	11955-2	LMP	LMP
LN	11976-8	Ovulation date	Exp.Ovul.

Context ID 12003 Extended OB-GYN Dates

Table 9.1-18

Context ID 12004 Extended Fetal Biometry Ratios Measurements

CSD	CV	СМ	Laterality	Label
LN	11871-1	FL/AC	N/A	FL/AC
LN	11872-9	FL/BPD	N/A	FL/BPD
LN	11873-7	FL/HC	N/A	FL/HC
LN	11823-2	Cephalic Index	N/A	CI(BPD/OFD)
LN	11947-9	HC/AC	N/A	HC/AC
MDSN	99000-01	FL/FOOT	N/A	FL/FOOT
MDSN	99000-02	ThC/AC	N/A	ThC/AC
MDSN	99000-04	Right Anterior Horn Lateral ventricular to Hemispheric Width Ratio	Right	Rt. Va/Hem
MDSN	99000-05	Leftt Anterior Horn Lateral ventricular to Hemispheric Width Ratio	Left	Lt. Va/Hem
MDSN	99000-08	Anterior Horn Lateral ventricular to Hemispheric Width Ratio	N/A	Va/Hem
MDSN	99000-06	Right Posterior Horn Lateral ventricular to Hemispheric Width Ratio	Right	Rt. Vp/Hem

		Left Posterior Horn Lateral		
MDSN	99000-07	ventricular to Hemispheric	Left	Lt. Vp/Hem
		Width Ratio		
		Posterior Horn Lateral		
MDSN	99000-09	ventricular to Hemispheric	N/A	Vp/Hem
		Width Ratio		

Context ID 12005 Extended Fetal Biometry Measurements

		-	1
CSD	CV	СМ	Label
LN	11820-8	Biparietal Diameter	BPD
LN	11851-3	Occipital-Frontal Diameter	OFD
LN	11984-2	Head Circumference	НС
LN	11818-2	Anterior-Posterior Abdominal Diameter	APD
LN	11862-0	Tranverse Abdominal Diameter	TAD
LN	11979-2	Abdominal Circumference	AC
LN	11963-6	Femur Length	FL
LN	11819-0	Anterior-Posterior Trunk Diameter	APTD
LN	11864-6	Transverse Thoracic Diameter	TTD
LN	11988-3	Thoracic Circumference	ThC
LN	11965-1	Foot length	Foot
LN	11834-9	Left Kidney length	Lt. Renal L
LN	11825-7	Left Kidney width	Lt. Renal AP
LN	11836-4	Right Kidney length	Rt. Renal L
LN	11827-3	Right Kidney width	Rt. Renal AP
MDSN	99001-18	Kidney length	Renal L
MDSN	99001-19	Kidney width	Renal AP
LN	33068-8	Thoracic Area	ThA
MDSN	99001-01	Middle Abdominal Diameter	MAD
MDSN	99005-13	Right Pelvis	Rt. Pelvis
MDSN	99005-14	Left Pelvis	Lt. Pelvis
MDSN	99005-01	Pelvis	Pelvis
MDSN	99001-02	Fetal Trunk Area	FTA
MDSN	99001-03	APTDxTTD	APTDxTTD

MDSN	99001-04	Ear Length	Ear
MDSN	99001-05	Middle Phalanx	MP
MDSN	99001-06	Thoracic Anteriorposterior Diameter	ThD ap
MDSN	99001-07	Thoracic Transverse Diameter	ThD trans
MDSN	99001-08	Heart Anteriorposterior Diameter	HrtD ap
MDSN	99001-09	Heart Transverse Diameter	HrtD trans
MDSN	99001-11	Cardio-Thoracic Area Ratio by Distance	CTAR(D)
MDSN	99001-12	Heart Area	HrtA
MDSN	99001-13	Cardio-Thoracic Area Ratio by Area	CTAR(A)
MDSN	99001-23	Cardio-Thoracic Area Ratio by Circumference	CTAR(C)

Context ID 12006 Extended Fetal Long Bones Biometry Measurements

CSD	CV	СМ	Laterality	Label
LN	11966-9	Humerus length	N/A, Right, Left	НИМ
LN	11969-3	Ulna length	N/A, Right, Left	ULNA
LN	11968-5	Tibia length	N/A, Right, Left	TIB
LN	11967-7	Radius length	N/A, Right, Left	RAD
LN	11964-4	Fibula length	N/A, Right, Left	FIB
LN	11962-8	Clavicle length	N/A, Right, Left	CLAV
MDSN	99002-01	Vertebral	N/A	Vertebral

Table 9.1-21Context ID 12007 Extended Fetal Cranium

CSD	CV	СМ	Laterality	Label
LN	11863-8	Trans Cerebellar Diameter	N/A	CEREB
LN	11860-4	Cisterna Magna length	N/A	СМ
LN	12146-7	Nuchal Fold thickness	N/A	NF
LN	33069-6	Nuchal Translucency	N/A	NT
LN	11629-3	Outer Orbital Diameter	N/A	OOD
LN	33070-4	Inner Orbital Diameter	N/A	IOD
LN	Anterior Horn Lateral N/A. Right, Left Va	Va		
LIN	55197-5	ventricular width	N/A, Right, Left	va

LN	33196-7	Posterior Horn Lateral ventricular width	N/A, Right, Left	Vp
LN	12170-7	Width of Hemisphere	N/A, Right, Left	HEM
SRT	T-11149	Nasal bone	N/A	NB
MDSN	99004-02	Frontomaxillary facial angle	N/A	FMF angle

Context ID 12008 Extended OB-GYN Amniotic Sac

CSD	CV	СМ	Label
LN	11624-4	First Quadrant Diameter	Q1
LN	11626-9	Second Quadrant Diameter	Q2
LN	11625-1	Third Quadrant Diameter	Q3
LN	11623-6	Fourth Quadrant Diameter	Q4
LN	11627-7	Amniotic Fluid Index	AFI
SRT	M-02550	Diameter	Max Vertical Pocket
MDSN	99004-01	MVP	MVP

Table 9.1-23

Context ID 12009 Extended Early Gestation Biometry Measurements

CSD	CV	СМ	Label
LN	11850-5	Gestational Sac Diameter	GS
LN	11957-8	Crown Rump Length	CRL
LN	11816-6	Yolk Sac length	YS
LN	33071-2	Spine Length	SL

Table 9.1-24

Context ID 12011 Extended Ultrasound Pelvis and Uterus

CSD	CV	СМ	Label
LN	11961-0	Cervix Length	
LN	12145-9	Endometrium Thickness	
MDSN	99005-02	Cervix Height	Cervix H
MDSN	99005-03	Cervix Width	Cervix W
MDSN	99005-04	Cervix Volume	Cervix Vol.

CSD	CV	СМ	Label
SRT	T-42000	Aorta	Fetal Aorta
SRT	T-D0765	Descending Aorta	Dsc Aorta (in Fetal Heart)
SRT	T-45600	Middle Cerebral Artery	Mid Cereb A
SRT	T-44000	Pulmonary Artery	MPA (in Fetal Heart)
SNM3	T 45040	Corotid orton	Lt. Fetal Carotid
SINIVIS	T-45010	Carotid artery	Rt. Fetal Carotid
MDSN	99008-02	Ductus Venosus	Ductus Venosus
MDSN	99008-03	Popol Artony	Lt. Renal A
MDSN	99008-03	Renal Artery	Rt. Renal A
SRT	T-48710	Inferior vena cava	IVC (in Fetal Heart)
MDSN	99008-07	Ductus Atriosus	Duct A
MDSN	99008-09	Ascending Aorta	Asc Aorta

Context ID 12141 Extended Fetal Vasculature Anatomical Location

Context ID 12140 Extended Pelvic Vasculature Anatomical Location

CSD	CV	СМ	Label
SRT	T-F1810	Umbilical Artery	Umbilical A
SRT	T-46980	Ovarian Artery	Lt. Ovarian A
	1-40900	Ovalian Allery	Rt. Ovarian A
SRT	T-46820	Uterine Artery	Lt. Uterine A (in OB or Gynecology)
	1-40020		Rt. Uterine A (in OB or Gynecology)
SRT	T-F1412	Vitelline Artery of Placenta	Placenta A
MDSN	99007-01	Perisystic Flow	Perisystic Flow
MDSN	99007-02	Endometrial Flow	Endometrial Flow

Table 9.1-27

Context ID 12119 Vascular Ultrasound Property

CSD	CV	СМ	Label
INCLUDE	CID 12120 Extended	ed Blood Velocity Measurements	
INCLUDE	CID 12121 Vascula	ar Indices and Ratios	
INCLUDE	CID 12122 Other V	ascular Properties	

CSD	CV	СМ	Label
LN	11653-3	End Diastolic Velocity	EDV
LN	11726-7	Peak Systolic Velocity	PSV
LN	20352-1	Time averaged mean velocity	TAMV
LN	11692-1	Time averaged peak velocity	TAPV
MDSN	99008-04	Systolic Peak Velocity	Duct. V S Vmax
MDSN	99008-05	Diastolic Peak Velocity	Duct. V D Vmax
MDSN	99008-06	Atrial Peak Velocity	Duct. V A Vmax

Context ID 12120 Extended Blood Velocity Measurement

Table 9.1-29

Context ID 12121 Vascular Indices and Ratios

CSD	CV	СМ	Label
LN	20167-3	Acceleration Index	Acc
SRT	R-101BA	Lumen Area Stenosis	%StA
SRT	R-101BB	Lumen Diameter Stenosis	%StD
LN	12008-9	Pulsatility Index	PI
LN	12023-8	Resistivity Index	RI
LN	12144-2	Systolic to Diastolic Velocity Ratio	S/D

Table 9.1-30

Context ID 12122 Other Vascular Properties

CSD	CV	СМ	Label
LN	20168-1	Acceleration Time	AccT
LN	20217-6	Deceleration Time	DecT
SRT	G-0364	Vessel lumen diameter	Dout
SRT	R-1025C	Vessel Intimal Diameter	Din
SRT	R-1025D	Vessel Intimal Cross-Sectional Area	Ain
SRT	G-0365	Vessel outside diameter	Vesl. Dist.
SRT	G-0366	Vessel lumen cross-sectional area	Aout
LN	33878-0	Volume flow	Vol. Flow
LN	20247-3	Peak Gradient	PGmax
LN	20256-4	Mean Gradient	PGmean

Table 9.1-31
Context ID 7304 Implant Target Anatomy

CSD	CV	СМ	Label
SRT	T-12410	Humerus	НИМ
SRT	T-12420	Radius	RAD
SRT	T-12430	Ulna	ULNA
SRT	T-12440	Tibia	ТІВ
SRT	T-12450	Fibula	FIB
SRT	T-12310	Clavicle	CLAV

Context ID 12022 Fetal Cranium Anatomic Sites

CSD	CV	СМ	Label
SRT	T-A1700	Anterior Horn Lateral Ventricle	Va
SRT	T-A1710	Posterior Horn Lateral Ventricle	Vp
SRT	T-A010F	Cerebral hemisphere	Hem

Table 9.1-33

Context ID 99100 Gynecology Finding Site

CSD	CV	СМ	Label
SRT	M-03000	Mass	Mass
MDSN	99009-04	Endometrial Polyp	Endo. Polyp
MDSN	99009-05	Ovarian Mass	Ovarian Mass
MDSN	99009-08	Ectopic Pregnancy	Ectopic Pregnancy
MDSN	99009-09	Uterine Fibroid	Uterine Fibroid
MDSN	99009-10	Cervix	Cervix Flow

Table 9.1-34

Context ID 99103 Gynecology Mass and Flow

CSD	CV	СМ	Label
SRT	M-03000	Mass	Mass
MDSN	99007-03	Endometrial Polyp Flow	Endo. Polyp
MDSN	99007-04	Ovarian Mass Flow	Ovarian Mass
MDSN	99007-07	Ectopic Flow	Ectopic Flow
MDSN	99007-08	Uterine Fibroid Flow	Uterine Fibroid

MDSN 99007-09	Cervical Flow	Cervix Flow
---------------	---------------	-------------

Context ID 90001 Ultrasound Measurement Methods

CSD	CV	СМ	Label
MDSN	99300-00	Auto Trace	
MDSN	99300-01	Limited Trace	(L)
MDSN	99300-02	Manual Trace	(M)
MDSN	99300-03	Auto Trace, Area Based Method (A)	
MDSN	99300-06	Auto Trace, Diameter Based Method (D)	
MDSN	99300-04	Limited Trace, Area Based Method (A)(L)	
MDSN	99300-07	Limited Trace, Diameter Based Method	(D)(L)
MDSN	99300-05	Manual Trace, Area Based Method (A)(M)	
MDSN	99300-08	Manual Trace, Diameter Based Method (D)(M)	

9.1.2.2 Gestational Age Equations and Tables (Context Group 12013) Table 9.1-36

Gestational Age Equations and Tables

Coding Scheme Designator	Code Value	Code Meaning
LN	11889-3	AC, Campbell 1975
LN	11892-7	AC, Hadlock 1984
LN	33076-1	AC, Shinozuka 1996
LN	11902-4	BPD, Hadlock 1984
LN	33538-0	BPD, Hansmann 1986
LN	11905-7	BPD, Jeanty 1984
LN	11906-5	BPD, Kurtz 1980
LN	33082-9	BPD, Osaka 1989
LN	11907-3	BPD, Sabbagha 1978
LN	33084-5	BPD, Shinozuka 1996
LN	33086-0	BPD-oi, Chitty 1997
LN	33087-8	BPD-oo, Chitty 1997
LN	33088-6	Clavical length, Yarkoni 1985

LN	11910-7	CRL, Hadlock 1992
LN	33540-6	CRL, Hansmann 1986
LN	11913-1	CRL, Nelson 1981
LN	33093-6	CRL, Osaka 1989
LN	33094-4	CRL, Rempen 1991
LN	11914-9	CRL, Robinson 1975
LN	33095-1	CRL, Shinozuka 1996
LN	33098-5	FL, Chitty 1997
LN	11920-6	FL, Hadlock 1984
LN	33541-4	FL, Hansmann 1986
LN	11922-2	FL, Hohler 1982
LN	11923-0	FL, Jeanty 1984
LN	33101-7	FL, Osaka 1989
LN	33102-5	FL, Shinozuka 1996
LN	11928-9	GS, Hellman 1969
LN	33107-4	GS, Nyberg 1992
LN	33108-2	GS, Tokyo 1986
LN	33110-8	HC measured, Chitty 1997
LN	33111-6	HC derived, Chitty 1997
LN	11932-1	HC, Hadlock 1984
LN	33543-0	HC, Hansmann 1986
LN	11936-2	Humerus, Jeanty 1984
LN	33117-3	Humerus Length, Osaka 1989
LN	33120-7	OFD, Hansmann 1986
LN	11941-2	Tibia, Jeanty 1984
LN	11944-6	Ulna, Jeanty 1984
LN	11929-7	GS, Rempen 1991
LN	33083-7	BPD, Rempen 1991

9.1.2.3 OB Fetal Body Weight Equations and Tables (Context ID 12014)

Table 9.1-37

OB Fetal Body Weight Equations and Tables

Coding Scheme Designator	Code Value	Code Meaning
LN	11756-4	EFW by AC, Campbell 1975

LN	11738-2	EFW by AC, BPD, Hadlock 1984
LN	11735-8	EFW by AC, BPD, FL, Hadlock 1985
LN	11732-5	EFW by AC, BPD, FL, HC, Hadlock 1985
LN	11751-5	EFW by AC, FL, Hadlock 1985
LN	11746-5	EFW by AC, FL, HC, Hadlock 1985
LN	33139-7	EFW by BPD, TTD, Hansmann 1986
LN	11739-0	EFW by AC and BPD, Shepard 1982
LN	33140-5	EFW by BPD, FTA, FL, Osaka 1990

9.1.2.4 Fetal Growth Equations and Tables (Context ID 12015) Table 9.1-38

Fetal Growth Equations and Tables			

Coding Scheme Designator	Code Value	Code Meaning
LN	33145-4	AC by GA, ASUM 2000
LN	33146-2	AC by GA, Hadlock 1984
LN	33147-0	AC (measured) by GA, Chitty 1994
LN	33546-3	AC (derived) by GA, Chitty 1994
LN	33149-6	AC by GA, Shinozuka 1996
LN	33151-2	BPD by GA, ASUM 2000
LN	33198-3	BPD by GA, Hadlock 1984
LN	33556-2	BPD outer-inner by GA, Chitty 1994
LN	33152-0	BPD outer-outer by GA, Chitty 1994
LN	33156-1	BPD by GA, Shinozuka 1996
LN	33161-1	CRL by GA, Shinozuka 1996
LN	33164-5	Fibula by GA, Jeanty 1983
LN	33165-2	FL by GA, ASUM 2000
LN	33166-0	FL by GA, Hadlock 1984
LN	33167-8	FL by GA, Chitty 1994
LN	33170-2	FL by GA, Shinozuka 1996
LN	33172-8	HC by GA, ASUM 2000
LN	33173-6	HC by GA, Hadlock 1984
LN	33174-4	HC derived by GA, Chitty 1994
LN	33177-7	Humerus Length by GA, ASUM 2000

E

_

LN	33178-5	OFD by GA, ASUM 2000
LN	33180-1	Radius by GA, Jeanty 1983
LN	33181-9	TCD by GA Goldstein 1987
LN	33155-3	BPD by GA, Rempen 1991
LN	33171-0	GS by GA, Rempen 1991

9.1.2.5 Estimated Fetal Weight Percentile Equations and Tables (Context ID 12016) Table 9.1-39

Estimated Fetal Weight Percentile Equations and Tables

Coding Scheme Designator	Code Value	Code Meaning
LN	33183-5	FWP by GA, Hadlock 1991
LN	33184-3	FWP by GA, Williams, 1982
LN	33189-2	FWP by GA, Brenner 1976

END OF DOCUMENT